

siunitx – A comprehensive (si) units package*

Joseph Wright[†]

Released 2026-04-09

Contents

1	Introduction	3
2	siunitx for the impatient	3
3	Using the siunitx package	5
3.1	Numbers	5
3.2	Angles	6
3.3	Durations	6
3.4	Units	6
3.5	Complex numbers and quantities	8
3.6	The unit macros	8
3.7	Unit abbreviations	11
3.8	Creating new macros	15
3.9	Tabular material	16
4	Package control options	19
4.1	The key–value control system	19
4.2	Printing	19
4.3	Parsing numbers	22
4.4	Post-processing numbers	24
4.5	Printing numbers	29
4.6	Lists, products and ranges	35
4.7	Complex numbers	38
4.8	Angles	40
4.9	Durations	42
4.10	Creating units	43
4.11	Using units	44
4.12	Quantities	48
4.13	Tabular material	49
4.14	Locale options	59
4.15	Preamble-only options	59

*This file describes v3.5.3, last revised 2026-04-09.

[†]E-mail: joseph@texdev.net

5	Significant new features updates	60
5.1	Version 3.1	60
5.2	Version 3.2	60
5.3	Version 3.3	61
5.4	Version 3.4	61
5.5	Version 3.5	61
6	Upgrading from version 2	61
7	Unit changes made by BIPM	63
8	Localisation	64
9	Compatibility with other packages	64
10	Hints for using siunitx	65
10.1	Problematic font encodings	65
10.2	Adjusting \litre and \liter	65
10.3	Ensuring text or math output	65
10.4	Including a literal hyphen inside \text	65
10.5	Expanding content in tables	66
10.6	Using siunitx with datatool	67
10.7	Using units in section headings and bookmarks	68
10.8	A left-aligned column visually centered under a heading	69
10.9	Regression tables	69
10.10	Maximising performance	70
10.11	Special considerations for the \kWh unit	71
10.12	Prefixes and small angles	72
10.13	Creating a column with numbers and units	72
10.14	Tables with heading rows	73
10.15	Associating a locale with a babel language	74
10.16	Symbolic “digits”	74
10.17	Demonstrating prefixes	74
10.18	Creating a set of pre-defined units	75
10.19	Overloading the standard interfaces	75
11	Using (SI) units	76
11.1	Units	77
11.2	Mathematical meaning	77
11.3	Graphs and tables	79
12	Installation	81
13	Thanks	81
14	Making suggestions and reporting bugs	82

Abstract

Physical quantities have both numbers and units, and each physical quantity should be expressed as the product of a number and a unit. Typesetting physical quantities requires care to ensure that the combined mathematical meaning of the number–unit combination is clear. In particular, the `si` units system lays down a consistent set of units with rules on how these are to be used. However, different countries and publishers have differing conventions on the exact appearance of numbers (and units). The `siunitx` package provides a set of tools for authors to typeset quantities in a consistent way. The package has an extended set of configuration options which make it possible to follow varying typographic conventions with the same input syntax. The package includes automated processing of numbers and units, and the ability to control tabular alignment of numbers.

1 Introduction

The correct application of units of measurement is very important in technical applications. For this reason, carefully-crafted definitions of a coherent units system have been laid down by the *Conférence Générale des Poids et Mesures* (CGPM): this has resulted in the *Système International d’Unités* (SI). At the same time, typographic conventions for correctly displaying both numbers and units exist to ensure that no loss of meaning occurs in printed matter.

The `siunitx` package aims to provide a unified method for \LaTeX users to typeset numbers and units correctly and easily. The design philosophy of `siunitx` is to follow the agreed rules by default, but to allow variation through option settings. In this way, users can use `siunitx` to follow the requirements of publishers, co-authors, universities, *etc.* without needing to alter the input at all.

2 `siunitx` for the impatient

The package provides the user macros:

- `\ang[⟨options⟩]{⟨angle⟩}`
- `\duration[⟨options⟩]{⟨duration⟩}`
- `\num[⟨options⟩]{⟨number⟩}`
- `\unit[⟨options⟩]{⟨unit⟩}`
- `\qty[⟨options⟩]{⟨number⟩}{⟨unit⟩}`
- `\numlist[⟨options⟩]{⟨numbers⟩}`
- `\numproduct[⟨options⟩]{⟨numbers⟩}`
- `\numrange[⟨options⟩]{⟨numbers⟩}{⟨number2⟩}`
- `\qtylist[⟨options⟩]{⟨numbers⟩}{⟨unit⟩}`
- `\qtyproduct[⟨options⟩]{⟨numbers⟩}{⟨unit⟩}`

- `\qtyrange[⟨options⟩]{⟨number1⟩}{⟨number2⟩}{⟨unit⟩}`
- `\complexnum[⟨options⟩]{⟨number⟩}`
- `\complexqty[⟨options⟩]{⟨number⟩}{⟨unit⟩}`
- `\sisetup{⟨options⟩}`
- `\tablenum[⟨options⟩]{⟨number⟩}`

plus the S column type for decimal alignments and units in tabular environments. These user macros and column types are designed for typesetting numbers and units with control of appearance and with intelligent processing.

Numbers are processed with understanding of exponents, or using additional commands for products and complex numbers.

12 345.678 90	<code>\num{12345,67890}</code>	<code>\\</code>
0.3×10^{45}	<code>\num{.3e45}</code>	<code>\\</code>
$1 \pm 2i$	<code>\complexnum{1+-2i}</code>	<code>\\</code>
$1.654 \times 2.34 \times 3.430$	<code>\numproduct{1.654 x 2.34 x 3.430}</code>	

The unit system can interpret units given as text to be used directly or as macro-based units. In the latter case, different formatting is possible.

<code>\unit{kg.m.s^{-1}}</code>	<code>\\</code>
<code>\unit{\kilogram\metre\per\second}</code>	<code>\\</code>
<code>\unit[per-mode = symbol]</code>	
<code>{\kilogram\metre\per\second}</code>	<code>\\</code>
<code>\unit[per-mode = symbol]</code>	
<code>{\kilogram\metre\per\ampere\per\second}</code>	
kg m s^{-1}	
kg m s^{-1}	
kg m/s	
kg m/(A s)	

Simple lists and ranges of numbers can be handled.

<code>\numlist{10;20;30}</code>	<code>\\</code>
<code>\qtylist{0.13;0.67;0.80}{\milli\metre}</code>	<code>\\</code>
<code>\numrange{10}{20}</code>	<code>\\</code>
<code>\qtyrange{0.13}{0.67}{\milli\metre}</code>	
10, 20 and 30	
0.13 mm, 0.67 mm and 0.80 mm	
10 to 20	
0.13 mm to 0.67 mm	

A wide range of options are available to control the behavior of the package. For example, with the standard settings all text is typeset in the current upright math font. This can be adjusted to use text mode, follow various aspects of the surrounding formatting, *etc.* Similarly, the standard settings are based around an English-speaking locale, but can be adjusted to follow the traditions of other areas.

3 Using the siunitx package

3.1 Numbers

`\num` `\num[options]{number}`

Numbers are automatically formatted by the `\num` macro. This takes one optional argument, *options*, and one mandatory one, *number*. The contents of *number* are automatically formatted. The formatter removes both “soft” (`\`) and “hard” spaces (`\`, `~`), automatically identifies exponents (as standard marked using *e*, *E*, *d* or *D*) and adds the appropriate spacing of large numbers. If required, a leading zero is added before a decimal marker: both `.` and `,` are recognised as decimal markers.

123	<code>\num{123}</code>	<code>\\</code>
1234	<code>\num{1234}</code>	<code>\\</code>
12 345	<code>\num{12345}</code>	<code>\\</code>
0.123	<code>\num{0.123}</code>	<code>\\</code>
0.1234	<code>\num{0,1234}</code>	<code>\\</code>
0.123 45	<code>\num{.12345}</code>	<code>\\</code>
3.45×10^{-4}	<code>\num{3.45d-4}</code>	<code>\\</code>
-10^{10}	<code>\num{-e10}</code>	

Note that numbers are parsed before typesetting, which does have a performance overhead (only obvious with very large amounts of numerical input). The parser understands a range of input syntaxes, as demonstrated above.

`\numlist` `\numlist[options]{numbers}`

Lists of numbers may be processed using the `\numlist` function. Each *number* is given within the list of *numbers* within a brace pair, as the list can have a flexible length.

10, 30, 50 and 70	<code>\numlist{10;30;50;70}</code>
-------------------	------------------------------------

`\numproduct` `\numproduct[options]{numbers}`

Runs of products of numbers may be inserted using the `\numproduct` function. This acts in the same way as `\num`, but inserts either a symbol or phrase between the entries. The latter should be separated by `x` tokens.

10×30	<code>\numproduct{10 x 30}</code>
----------------	-----------------------------------

`\numrange` `\numrange[options]{number1}{number2}`

Simple ranges of numbers can be handled using the `\numrange` function. This acts in the same way as `\num`, but inserts a phrase or other text between the two entries.

10 to 30	<code>\numrange{10}{30}</code>
----------	--------------------------------

3.2 Angles

`\ang` `\ang[options]{angle}`

Angles can be typeset using the `\ang` command. The *angle* can be given either as a decimal number or as a semi-colon separated list of degrees, minutes and seconds, which is called “arc format” in this document. The numbers which make up an angle are processed using the same system as other numbers. However, no unit prefixes are applied here: as such, conversion from exponent form to unit prefixes does not apply.

10°	<code>\ang{10}</code>	<code>\\</code>
12.3°	<code>\ang{12.3}</code>	<code>\\</code>
4.5°	<code>\ang{4,5}</code>	<code>\\</code>
$1^\circ 2' 3''$	<code>\ang{1;2;3}</code>	<code>\\</code>
$1''$	<code>\ang{;;1}</code>	<code>\\</code>
10°	<code>\ang{+10;;}</code>	<code>\\</code>
$-1'$	<code>\ang{-0;1;}</code>	

3.3 Durations

`\duration` `\duration[options]{angle}`

Durations (of hours, minutes and seconds) can be typeset using the `\duration` command. The *duration* can be given either as a decimal number or as a semi-colon separated list of hours, minutes and seconds, which is called “component format” in this document. The numbers which make up a duration are processed using the same system as other numbers. However, no unit prefixes are applied here: as such, conversion from exponent form to unit prefixes does not apply.

10 h	<code>\duration{10}</code>	<code>\\</code>
12.3 h	<code>\duration{12.3}</code>	<code>\\</code>
4.5 h	<code>\duration{4,5}</code>	<code>\\</code>
$1\text{ h } 2\text{ min } 3\text{ s}$	<code>\duration{1;2;3}</code>	<code>\\</code>
1 s	<code>\duration{;;1}</code>	<code>\\</code>
10 h	<code>\duration{+10;;}</code>	<code>\\</code>
-1 min	<code>\duration{-0;1;}</code>	

3.4 Units

`\unit` `\unit[options]{unit}`

The symbol for a unit can be typeset using the `\unit` macro: this provides full control over output format for the unit. Like the `\num` macro, `\unit` takes one optional and one mandatory argument. The unit formatting system can accept two types of input. When the *unit* contains literal items (for example letters or numbers) then `siunitx` converts `.` and `~` into inter-unit product and correctly positions sub- and superscripts specified using `_` and `^`. The formatting methods will work with both math and text mode.

kg m/s^2	<code>\unit{kg.m/s^2} \\</code>
$\text{g}_{\text{polymer}} \text{mol}_{\text{cat}} \text{s}^{-1}$	<code>\unit{g_{polymer}~mol_{cat}.s^{-1}}</code>

The second operation mode for the `\unit` macro is an “interpreted” system. Here each unit, si multiple prefix and power is given a macro name. These are entered in a method very similar to the reading of the unit name in English.

```

\unit{kilo\gram\metre\per\square\second} \\
\unit{gram\per\cubic\centi\metre} \\
\unit{square\volt\cubic\lumen\per\farad} \\
\unit{metre\squared\per\gray\cubic\lux} \\
\unit{henry\second}

kg m s-2
g cm-3
V2 lm3 F-1
m2 Gy-1 lx3
Hs

```

On its own, this is less convenient than the direct method, although it does use meaning rather than appearance for input. However, the package allows you to define new unit macros; a large number of pre-defined abbreviations are also supplied. More importantly, by defining macros for units, instead of literal input, new functionality is made available. By altering the settings used by the package, the same input can yield a variety of different output formats. For example, the `\per` macro can give reciprocal powers, slashes or be used to construct units as fractions.

`\qty` `\qty[options]{number}{unit}`

Very often, numbers and units are given together. Formally, the value of a quantity is the product of the number and the unit, the space being regarded as a multiplication sign. The `\qty` macro combines the functionality of `\num` and `\unit`, and makes this both possible and easy. The `<number>` and `<unit>` arguments work exactly like those for the `\num` and `\unit` macros, respectively.

<code>\qty[mode = text]{1.23}{J.mol⁻¹.K⁻¹}</code>	<code>\\</code>
<code>\qty{.23e7}{candela}</code>	<code>\\</code>
<code>\qty[per-mode = symbol]{1.99}{\per\kilogram}</code>	<code>\\</code>
<code>\qty[per-mode = fraction]{1,345}{coulomb\per\mole}</code>	

$1.23 \text{ J mol}^{-1} \text{ K}^{-1}$
 $0.23 \times 10^7 \text{ cd}$
 $1.99/\text{kg}$
 $1.345 \frac{\text{C}}{\text{mol}}$

It is possible to set up the unit macros to be available outside of the `\qty` and `\unit` functions. This is not the standard behavior as there is the risk of name clashes (for example, `\day` is a \TeX primitive and several packages define `\degree`). Full details of using “stand alone” units are found in 4.10.

`\qtylist` `\qtylist[options]{numbers}{unit}`

Lists of numbers with units can be handled using the `\qtylist` function. The behavior of this function is similar to `\numlist`, but with the addition of the unit to each number.

10 m, 30 m and 45 m

`\qtylist{10;30;45}{\metre}`

`\qtyproduct` `\qtyproduct[<options>]{<numbers>}{<unit>}`

Runs of products of numbers with units can be handled using the `\qtyproduct` function. The behavior of this function is similar to `\numproduct`, but with the addition of a unit to each number.

10 m × 30 m × 45 m

`\qtyproduct{10 x 30 x 45}{\metre}`

`\qtyrange` `\qtyrange[<options>]{<number1>}{<number2>}{<unit>}`

Ranges of numbers with units can be handled using the `\qtyrange` function. The behavior of this function is similar to `\numrange`, but with the addition of a unit to each number.

10 m to 30 m

`\qtyrange{10}{30}{\metre}`

The input of lists, products and ranges of quantities using a single command allows them to be adjusted together. These commands are intended to allow consistent formatting of related values: as such, they apply a single unit to all of the values. This is particularly notable when using adjustment of the numerical values.

3.5 Complex numbers and quantities

`\complexnum` `\complexnum[<options>]{<number>}`

Typesets the complex number, which can be given in the Cartesian form $a + bi$ or $a + ib$, or in the polar form $r:\theta$. Processing of the numerical parts is otherwise identical to the standard `\num` command.

`\complexqty` `\complexqty[<options>]{<number>}{<unit>}`

Typesets the complex number, which can be given in the Cartesian form $a + bi$ or $a + ib$, or in the polar form $r:\theta$. Processing of the numerical parts is otherwise identical to the standard `\qty` command.

3.6 The unit macros

The package always defines the basic set of SI units with macro names. This includes the base SI units, the derived units with special names and the prefixes. A small number of powers are also given pre-defined names. Full details of units in the SI are available on-line [1].

The seven base SI units are always defined (Table 1). In addition, the macro `\meter` is available as an alias for `\metre`, for users of US spellings. The full details of the base units are given in the SI Brochure.

The SI also lists a number of units which have special names and symbols: these are listed in Table 2.

Table 1: SI base units.

Unit	Command	Symbol
ampere	\ampere	A
candela	\candela	cd
kelvin	\kelvin	K
kilogram	\kilogram	kg
metre	\metre	m
mole	\mole	mol
second	\second	s

Table 2: Coherent derived units in the SI with special names and symbols.

Unit	Command	Symbol	Unit	Command	Symbol
becquerel	\becquerel	Bq	newton	\newton	N
degree Celsius	\degreeCelsius	°C	ohm	\ohm	Ω
coulomb	\coulomb	C	pascal	\pascal	Pa
farad	\farad	F	radian	\radian	rad
gray	\gray	Gy	siemens	\siemens	S
hertz	\hertz	Hz	sievert	\sievert	Sv
henry	\henry	H	steradian	\steradian	sr
joule	\joule	J	tesla	\tesla	T
lumen	\lumen	lm	volt	\volt	V
katal	\katal	kat	watt	\watt	W
lux	\lux	lx	weber	\weber	Wb

Table 3: Non-si units accepted for use with the International System of Units.

Unit	Command	Symbol
astronomical unit	<code>\astronomicalunit</code>	au
bel	<code>\bel</code>	B
dalton	<code>\dalton</code>	Da
day	<code>\day</code>	d
decibel	<code>\decibel</code>	dB
degree	<code>\degree</code>	°
electronvolt	<code>\electronvolt</code>	eV
hectare	<code>\hectare</code>	ha
hour	<code>\hour</code>	h
litre	<code>\litre</code>	L
	<code>\liter</code>	L
minute (plane angle)	<code>\arcminute</code>	'
minute (time)	<code>\minute</code>	min
second (plane angle)	<code>\arcsecond</code>	"
neper	<code>\neper</code>	Np
tonne	<code>\tonne</code>	t

In addition to the official si units, siunitx also provides macros for a number of units which are accepted for use in the si although they are not si units. Table 3 lists the “accepted” units. The command `\percent` is also provided for use in units: this is accepted with the si as detailed in Section 5.4.7 of the Brochure.

In addition to the units themselves, siunitx provides pre-defined macros for all of the si prefixes (Table 4). The spelling “\deka” is provided for US users as an alternative to `\deca`.

A small number of pre-defined powers are provided as macros. `\square` and `\cubic` are intended for use before units, with `\squared` and `\cubed` going after the unit.

Bq^2	<code>\unit{\square\becquerel} \\\</code>
$\text{J}^2 \text{lm}^{-1}$	<code>\unit{\joule\squared\per\lumen} \\\</code>
$\text{lx}^3 \text{V T}^3$	<code>\unit{\cubic\lux\volt\tesla\cubed}</code>

Generic powers can be inserted on a one-off basis using the `\tothe` and `\raiseto` macros. These are the only macros for units which take an argument:

H^5	<code>\unit{\henry\tothe{5}} \\\</code>
$\text{rad}^{4.5}$	<code>\unit{\raiseto{4.5}\radian}</code>

Reciprocal powers are indicated using the `\per` macro. This applies to the next unit only, unless the `sticky-per` option is turned on.

$\text{J mol}^{-1} \text{K}^{-1}$	<code>\unit{\joule\per\mole\per\kelvin} \\\</code>
$\text{J mol}^{-1} \text{K}$	<code>\unit{\joule\per\mole\kelvin} \\\</code>
H^{-5}	<code>\unit{\per\henry\tothe{5}} \\\</code>
Bq^{-2}	<code>\unit{\per\square\becquerel}</code>

As for generic powers, generic qualifiers are also available using the `\of` function:

Table 4: SI prefixes.

Prefix	Command	Symbol	Power	Prefix	Command	Symbol	Power
quecto	\quecto	q	−30	deca	\deca	da	1
ronto	\ronto	r	−27	hecto	\hecto	h	2
yocto	\yocto	y	−24	kilo	\kilo	k	3
zepto	\zepto	z	−21	mega	\mega	M	6
atto	\atto	a	−18	giga	\giga	G	9
femto	\femto	f	−15	tera	\tera	T	12
pico	\pico	p	−12	peta	\peta	P	15
nano	\nano	n	−9	exa	\exa	E	18
micro	\micro	μ	−6	zetta	\zetta	Z	21
milli	\milli	m	−3	yotta	\yotta	Y	24
centi	\centi	c	−2	ronna	\ronna	R	27
deci	\deci	d	−1	quetta	\quetta	Q	30

```
\unit{\kilogram\of{metal}} \
\qty[qualifier-mode = bracket]
  {0.1}{\milli\mole\of{cat}\per\kilogram\of{prod}}
kgmetal
0.1 mmol(cat) kg(prod)−1
```

When the cancel package is loaded, it is possible to “cancel out” units using the \cancel macro. This applies to the next unit, in a similar manner to a prefix. The \highlight macro is also available to selectively color units. Both \cancel and \highlight are outside of the normal semantic meaning of units, but are provided as they may be useful in some cases.

```
\unit[per-mode = fraction]
  {\cancel\kilogram\metre\per\cancel\kilogram\per\second} \
\unit{\highlight{red}\kilogram\metre\per\second} \
\unit[unit-color = purple]
  {\highlight{blue}\kilogram\metre\per\second}
kgm
kgs
kg m s−1
kg m s−1
```

3.7 Unit abbreviations

In addition to the “full” names, siunitx loads a set of abbreviated versions of the SI units (Table 5). The standard siunitx settings only create these abbreviations within the scope of the \unit and \qty functions, meaning that no clashes should occur (for example with the standard \pm symbol).

Table 5: Unit abbreviations

Unit	Abbreviation	Symbol
femtogram	\fg	fg
picogram	\pg	pg
nanogram	\ng	ng
microgram	\ug	μ g
milligram	\mg	mg
gram	\g	g
kilogram	\kg	kg
picometre	\pm	pm
nanometre	\nm	nm
micrometre	\um	μ m
millimetre	\mm	mm
centimetre	\cm	cm
decimetre	\dm	dm
metre	\m	m
kilometre	\km	km
attosecond	\as	as
femtosecond	\fs	fs
picosecond	\ps	ps
nanosecond	\ns	ns
microsecond	\us	μ s
millisecond	\ms	ms
second	\s	s
femtomole	\fmol	fmol
picomole	\pmol	pmol
nanomole	\nmol	nmol
micromole	\umol	μ mol
millimole	\mmol	mmol
mole	\mol	mol
kilomole	\kmol	kmol
picoampere	\pA	pA
nanoampere	\nA	nA

Continued on next page

Continued from previous page

Unit	Abbreviation	Symbol
microampere	\uA	μA
milliampere	\mA	mA
ampere	\A	A
kiloampere	\kA	kA
microlitre	\uL	μL
millilitre	\mL	mL
litre	\L	L
hectolitre	\hL	hL
microliter	\uL	μL
milliliter	\mL	mL
liter	\L	L
hectoliter	\hL	hL
millihertz	\mHz	mHz
hertz	\Hz	Hz
kilohertz	\kHz	kHz
megahertz	\MHz	MHz
gigahertz	\GHz	GHz
terahertz	\THz	THz
millinewton	\mN	mN
newton	\N	N
kilonewton	\kN	kN
meganewton	\MN	MN
pascal	\Pa	Pa
kilopascal	\kPa	kPa
megapascal	\MPa	MPa
gigapascal	\GPa	GPa
milliohm	\mohm	$\text{m}\Omega$
kilohm	\kohm	$\text{k}\Omega$
megohm	\Mohm	$\text{M}\Omega$
picovolt	\pV	pV
nanovolt	\nV	nV
microvolt	\uV	μV
millivolt	\mV	mV
volt	\V	V
kilovolt	\kV	kV
watt	\W	W

Continued on next page

Continued from previous page

Unit	Abbreviation	Symbol
nanowatt	\nW	nW
microwatt	\uW	μ W
milliwatt	\mW	mW
kilowatt	\kW	kW
megawatt	\MW	MW
gigawatt	\GW	GW
joule	\J	J
microjoule	\uJ	μ J
millijoule	\mJ	mJ
kilojoule	\kJ	kJ
electronvolt	\eV	eV
millielectronvolt	\meV	meV
kiloelectronvolt	\keV	keV
megaelectronvolt	\MeV	MeV
gigaelectronvolt	\GeV	GeV
teraelectronvolt	\TeV	TeV
kilowatt hour	\kWh	kW h
farad	\F	F
femtofarad	\fF	fF
picofarad	\pF	pF
nanofarad	\nF	nF
microfarad	\uF	μ F
millifarad	\mF	mF
henry	\H	H
femtohenry	\fH	fH
picohenry	\pH	pH
nanohenry	\nH	nH
millihenry	\mH	mH
microhenry	\uH	μ H
coulomb	\C	C
nanocoulomb	\nC	nC
millicoulomb	\mC	mC
microcoulomb	\uC	μ C
tesla	\T	T
millitesla	\mT	mT
microtesla	\uT	μ T

Continued on next page

Table 6: Binary prefixes.

Prefix	Command	Symbol	Power
kibi	<code>\kibi</code>	Ki	10
mebi	<code>\mebi</code>	Mi	20
gibi	<code>\gibi</code>	Gi	30
tebi	<code>\tebi</code>	Ti	40
pebi	<code>\pebi</code>	Pi	50
exbi	<code>\exbi</code>	Ei	60
zebi	<code>\zebi</code>	Zi	70
yobi	<code>\yobi</code>	Yi	80

Continued from previous page

Unit	Abbreviation	Symbol
kelvin	<code>\K</code>	K
decibel	<code>\dB</code>	dB

`bit` Binary data is expressed in units of bits and bytes. These are normally given prefixes
`byte` which use powers of two, rather than the powers of ten used by the `si` prefixes. As these binary prefixes are closely related to the `si` prefixes, they are defined by `siunitx`.

3.8 Creating new macros

The various macro components of a unit have to be defined before they can be used. The package supplies a number of common definitions, but new definitions are also possible. As the definition of a logical unit should remain the same in a single document, these creation functions are all preamble-only.

```
\DeclareSIUnit[options]{unit}{symbol}
```

New units are produced using the `\DeclareSIUnit` macro. The `<symbol>` can contain literal input, other units, multiple prefixes, powers and `\per`, although literal text should not be intermixed with unit macros. Units can be created with `<options>` from the usual list understood by `siunitx`, and apply the specific unit macro only. The (first) optional argument to `\qty` and `\unit` can be used to override the settings for the unit: an example is the `\degree` unit.

```
3.1415° \qty{3.1415}{\degree}
```

This is declared in the package (effectively) as

```
\DeclareSIUnit[quantity-product = {}]{\degree}{\text{\textdegree}}
```

The spacing can still be altered at point of use:

```
\qty{67890}{\degree} \\\
\qty[quantity-product = \,]{67890}{\degree}
```

67 890°
67 890°

The meaning of a pre-defined unit can be altered by using `\DeclareSIUnit` after loading `siunitx`. This will overwrite the original definition with the newer version.

`\DeclareSIPrefix` `\DeclareSIPrefix{<prefix>}{<symbol>}{<powers-ten>}`

The standard si powers of ten are defined by the package, and are described above. However, the user can define new prefixes with `\DeclareSIPrefix`. For example, `\kilo` is defined

`\DeclareSIPrefix\kilo{k}{3}`

`\DeclareSIPower` `\DeclareSIPower{<symbol-before>}{<symbol-after>}{<power>}`

This function creates two symbols, one for use before a unit, the second for use after a unit, both of which are equivalent to the `<power>`. For example, one might use

`\DeclareSIPower\quartic\tothefourth{4}`

with the functions then used in the document as

kg^4	<code>\unit{\kilogram\tothefourth}\</code>
m^4	<code>\unit{\quartic\metre}</code>

`\DeclareSIQualifier` `\DeclareSIQualifier{<qualifier>}{<symbol>}`

Following the syntax of the other macros, qualifiers may be created using the `\DeclareSIQualifier` command. In contrast to the other parts of a unit, there are no pre-defined qualifiers. It is therefore entirely up to the user to create these. For example, to identify the mass of a product created when using a particular catalyst, the preamble could contain:

`\DeclareSIQualifier\polymer{pol}`
`\DeclareSIQualifier\catalyst{cat}`

and then in the body the document could read

`\qty{1.234}{\gram\polymer\per\mole\catalyst\per\hour}`

$1.234 \text{ g}_{\text{pol}} \text{ mol}_{\text{cat}}^{-1} \text{ h}^{-1}$

3.9 Tabular material

Aligning numbers in tabular content is handled by a new column type, the S column. This new column type can align material using a number of different strategies, with the aim of flexibility of output without needing to alter the input. The method used as standard is to place the decimal marker in the number at the center of the cell and to align the material appropriately (Table 7).

Table 7: Standard behavior of the S column type.

Some Values
2.3456
34.2345
-6.7835
90.473
5642.5
1.2×10^3
10^4

```

\begin{table}
  \caption{Standard behavior of the \texttt{S} column type.}
  \label{tab:S:standard}}
  \begin{tabular}{@{}S@{}}
    \toprule
    {Some Values} \\
    \midrule
    2.3456 \\
    34.2345 \\
    -6.7835 \\
    90.473 \\
    5642.5 \\
    1.2e3 \\
    e4 \\
    \bottomrule
  \end{tabular}
\end{table}

```

The S column will attempt to automatically detect material which should be placed before or after a number, and will maintain the alignment of the numerical data (Table 8). If the material could be mistaken for part of a number, it should be protected by braces. The use of `\color` in a table cell will also be detected and will override any general color applied by `siunitx`.

```

\begin{table}
  \caption{Detection of surrounding material in an \texttt{S} column.}
  \label{tab:S:extras}}
  \begin{tabular}{@{}S@{}}
    \toprule
    {Some Values} \\
    \midrule
    12.34 \\
    \color{purple} 975,31 \\
    44.268 \textsuperscript{\emph{a}} \\
    \bottomrule
  \end{tabular}
\end{table}

```

`\tablenum` `\tablenum[options]{number}`

Table 8: Detection of surrounding material in an S column.

Some Values
12.34
975.31
44.268 ^a

Table 9: Controlling complex alignment with the `\tablenum` macro.

Heading	Heading	Heading	Heading
Info	More info		
Info	More info	88.999	aaa
	12.34		bbb
	333.5567	33.435	ccc
	4563.21		ddd

Within more complex tables, aligned numbers may be desirable within the argument of `\multicolumn` or `\multirow`.¹ The `\tablenum` function is available to achieve alignment in these situations: this is, in effect, a macro version of the S column (Table 9).

```
\begin{table}
  \caption{Controlling complex alignment with the \cs{tablenum} macro.}
  \label{tab:tablenum}}
  \begin{tabular}{@{}lr@{}}
    \toprule
    Heading & Heading & \\
    \midrule
    Info & More info & \\
    Info & More info & \\
    & 12.34 & \\
    & 333.5567 & \\
    & 4563.21 & \\
    \bottomrule
  \end{tabular}
  \hspace{\fill}%
  \begin{tabular}{@{}lr@{}}
    \toprule
    Heading & Heading & \\
    \midrule
    \multirow{2}{*}{\tablenum{88,999}} & & aaa \\
    & & bbb \\
    \multirow{2}{*}{\tablenum{33,435}} & & ccc \\
    & & ddd \\
    \bottomrule
  \end{tabular}
\end{table}
```

¹Provided by the `multirow` package

4 Package control options

4.1 The key–value control system

The package uses a range of different key types:

Choice Takes a limited number of choices, which are described separately for each key.

Integer Requires a number as the argument.

Length Requires a length, either as a literal value such as 2.0cm, or stored as a L^AT_EX length.

Literal A key which uses the value(s) given directly, either to check input or in output.

Macro Requires a macro, which may need a single argument.

Math Similar to a `literal` option, but the input is always used in math mode, irrespective of other `siunitx` settings. Thus to text-mode only input must be placed inside the argument of a `\text` macro.

Meta These are options which actually apply a number of other options.

Switch These are on–off switches, and recognise `true` and `false`. Giving just the key name also turns the key on.

The tables of option names use these descriptions to indicate how the keys should be used.

4.2 Printing

The `siunitx` package can control the font used to print output independently of the surrounding material. Which aspects of the font follow those of the surroundings is influenced by a range of setting as detailed in Table 10.

<code>mode</code>	The <code>mode</code> option determines whether <code>siunitx</code> uses math or text mode when printing
<code>number-mode</code>	output. The choices are <code>match</code> , <code>math</code> , <code>text</code> . The <code>match</code> setting means that printing uses
<code>unit-mode</code>	the prevailing mode unchanged whereas <code>math</code> and <code>text</code> select the appropriate T _E X mode. It is possible to have different fonts in math and text modes, which will highlight the difference. The font settings which apply are also different depending on the mode. As well as the overall setting, it is possible to apply mode to numbers and units separately using the <code>number-mode</code> and <code>unit-mode</code> options.
<code>reset-text-family</code>	When printing in text mode, the options <code>reset-text-family</code> , <code>reset-text-series</code>
<code>reset-text-series</code>	and <code>reset-text-shape</code> apply. When these are active, <code>siunitx</code> resets the relevant font se-
<code>reset-text-shape</code>	lection axis property when printing: the standard font setting is upright mid-weight roman (<code>\upshape \mdseries \rmfamily</code>).

Table 10: Print options.

Option name	Type	Default
color	Literal	<i>⟨none⟩</i>
mode	Choice	math
number-color	Literal	<i>⟨none⟩</i>
number-mode	Choice	math
propagate-math-font	Switch	false
reset-math-version	Switch	true
reset-text-family	Switch	true
reset-text-series	Switch	true
reset-text-shape	Switch	true
text-family-to-math	Switch	false
text-font-command	Literal	<i>⟨none⟩</i>
text-subscript-command	Literal	<code>\textsubscript</code>
text-superscript-command	Literal	<code>\textsuperscript</code>
text-series-to-math	Switch	false
unit-color	Literal	<i>⟨none⟩</i>
unit-mode	Choice	math

```

1234 \sisetup{mode = text}
1234 {\itshape \num{1234}}\\
1234 {\bfseries \num{1234}}\\
1234 {\sffamily \num{1234}}\\
1234 \sisetup{
1234     reset-text-family = false ,
1234     reset-text-series = false ,
1234     reset-text-shape = false
1234 }
1234 {\itshape \num{1234}}\\
1234 {\bfseries \num{1234}}\\
1234 {\sffamily \num{1234}}\\

```

propagate-math-font In math mode, the font used by L^AT_EX is “invariant”, and this is reflected in the op-
reset-math-version tions available. With the standard settings, in math mode printing uses the standard
math font and version (weight). The option propagate-math-font may be used to ap-
ply the prevailing math font to the printed material. The setting reset-math-version
controls whether the math version is reset or not. Note that math version is typically
used to set “bold math” but may also be used for other effects, for example all sanserif
math.

```

kg {\boldmath \unit{\kilogram}}\\
kg {\sansmath $\unit{\kilogram}$}\\
kg {\$ \mathsf{\unit{\kilogram}}$}\\
kg \sisetup{
kg     propagate-math-font = true ,
kg     reset-math-version = false
kg }
kg {\boldmath \unit{\kilogram}}\\
kg {\sansmath $\unit{\kilogram}$}\\
kg {\$ \mathsf{\unit{\kilogram}}$}

```

`text-family-to-math` The options `text-family-to-math` and `text-series-to-math` can be used to match
`text-series-to-math` (as far as possible) math mode output to the surrounding text. These options work by
detecting the current text settings and making the appropriate choice in math mode.

	<code>{\sffamily \unit{\kilogram}}\%</code>
	<code>{\bfseries \$\unit{\kilogram}\$}\%</code>
<code>kg</code>	<code>\sisetup{</code>
<code>kg</code>	<code>text-family-to-math = true</code> ,
<code>kg</code>	<code>text-series-to-math = true</code>
<code>kg</code>	<code>}</code>
	<code>{\sffamily \unit{\kilogram}}\%</code>
	<code>{\bfseries \$\unit{\kilogram}\$}</code>

`text-font-command` In some circumstances, it may be desirable to use a non-standard font command
when printing in text mode. This might be used for example to switch from old-style to
lining numbers whilst still using text mode. This may be achieved by setting `text-font-`
`command`. For example, this document uses old-style numbers in text mode as-standard,
which can be over-ridden by selecting the font variant which does not feature them.

```

\sisetup{number-mode = text}
\qty{123456789}{\kilo\volt\per\centi\metre} \\\
\sisetup{text-font-command = \fontfamily{pplx}\selectfont}
\qty{123456789}{\kilo\volt\per\centi\metre}

123 456 789 kV cm-1
123 456 789 kV cm-1

```

`text-subscript-command` In most cases, the commands `\textsubscript` and `\textsuperscript` are appro-
`text-superscript-command` priate for creating sub- and superscript material in text mode. However, when the re-
alscripts package is loaded, it is possible that the output is not as desired. These two
commands are therefore available to allow tuning of the results. They can also be used
for non-standard effects, for example as here adding color to subscripts.

```

\sisetup{unit-mode = text}
\unit{\kg\of{polymer}} \\\
\newcommand*\mysubscript[1]{%
  \textsubscript{\textcolor{blue}{#1}}%
}
\sisetup{text-subscript-command = \mysubscript}
\unit{\kg\of{polymer}}

kgpolymer
kgpolymer

```

`color` The color of printed output can be set using the `color` option. When no color is
`number-color` given, printing follows the surrounding text. In contrast, when a specific color is given,
`unit-color` it is used irrespective of the surroundings. As with mode, the `color` setting may also be
applied to numbers and units independently.

Some text	<code>\color{red}%</code>
4 kg	Some text <code>\%</code>
More text	<code>\qty{4}{\kilogram} \%</code>
4 kg	More text <code>\%</code>
Still red here!	<code>\qty[color = blue]{4}{\kilogram} \%</code>
	Still red here!

Table 11: Options for number parsing.

Option name	Type	Default
evaluate-expression	Switch	false
expression	Literal	#1
input-close-uncertainty	Literal)
input-comparators	Literal	<=>\approx\ge\geq \gg\le\leq\ll\sim
input-decimal-markers	Literal	.,
input-digits	Literal	0123456789
input-exponent-markers	Literal	dDeE
input-ignore	Literal	<none>
input-open-uncertainty	Literal	(
input-signs	Literal	+-\pm\mp
input-uncertainty-divider	Literal	:
input-uncertainty-signs	Literal	\pm
parse-numbers	Switch	true
retain-explicit-decimal-marker	Switch	false
retain-explicit-plus	Switch	false
retain-negative-zero	Switch	false
retain-zero-uncertainty	Switch	false

Note that the color does *not* apply to text inserted by the package between numbers, units or quantities. For example, in

```
\numproduct[color = blue, product-mode = phrase]{1x2}
```

1 by 2

only the numerals are colored; coloring all output should be done using the standard L^AT_EX interfaces.

4.3 Parsing numbers

The package uses a sophisticated parsing system to understand numbers. This allows siunitx to carry out a range of formatting, as described later. All of the input options take lists of literal tokens, and are summarised in Table 11.

input-digits The basic parts of a number are the digits, any sign and a separator between the integer and decimal parts. These are stored in the input options **input-digits**, **input-decimal-markers** and **input-signs**, respectively. More than one input decimal marker can be used: it will be converted by the package to the appropriate output marker. Numbers which include an exponent part also require a marker for the exponent: this again is taken from the range of tokens in the **input-exponent-markers** option.

input-ignore Tokens given in the **input-ignore** list are totally passed over by siunitx: they will be removed from the input with no further processing.

input-comparators In addition to signs, siunitx can recognise comparators, such as <. The package will automatically carry out conversions for <<, >>, <=, >= and ~ to \ll, \gg, \le, \ge and \sim, respectively.

<10	<code>\num{< 10} \\\</code>
$\gg 5\text{ m}$	<code>\qty{>> 5}{\metre} \\\</code>
≤ 0.12	<code>\num{1e 0.12}</code>

`input-open-uncertainty` In some fields, it is common to give the uncertainty in a number in brackets after the main part of the number, for example “1.234(5)”. The opening and closing symbols used for this type of input are set as `input-open-uncertainty` and `input-close-uncertainty`. Alternatively, the uncertainty may be given as a separate part following a sign. Which signs are valid for this operation is determined by the `input-uncertainty-signs` option. As with other signs, the combination `+ -` will automatically be converted to `\pm` internally.

$9.99(9)$	<code>\num{9.99(9)} \\\</code>
$9.99(9)$	<code>\num{9.99 +- 0.09} \\\</code>
$9.99(9)$	<code>\num{9.99 \pm 0.09} \\\</code>
$123.0(45)$	<code>\num{123 +- 4.5} \\\</code>
$12.3(60)$	<code>\num{12.3 +- 6}</code>

Uncertainties which cross the decimal marker may be given with or without a decimal marker in “compact” form. These are treated as equivalent by the code.² Where multiple uncertainty values cross the decimal marker, they should all have the same number of digits.

$123.4(12)$	<code>\num{123.4(12)} \\\</code>
$123.4(12)$	<code>\num{123.4(1.2)}</code>

Multiple symmetrical uncertainties may also be given: these must all either be in the short or the long form.

$123.4 \pm 1.2 \pm 4.5$	<code>\num{123.4(12)(45)} \\\</code>
$123.4 \pm 1.2 \pm 4.5$	<code>\num{123.4 \pm 1.2 \pm 4.5}</code>

`input-uncertainty-divider` In some areas, uncertainties (or tolerances) are given in an asymmetric format. This is supported in the “compact” input form in `siunitx`, with the positive and negative parts of the uncertainty divided by a symbol listed in `input-uncertainty-divider`. When given in this divided form, the two parts are interpreted as first the positive and then the negative component. Asymmetric uncertainties which cross the decimal marker are supported provided both components have the same number of digits.

$10.56^{+0.12}_{-0.34}$	<code>\num{10.56(12:34)} \\\</code>
$123.4^{+4.6}_{-7.8}$	<code>\num{123.4(4.6:7.8)}</code>

Symmetrical and asymmetrical uncertainties may be intermixed.

$10.56^{+0.01}_{-0.02} \pm 0.03$	<code>\num{10.56(1:2)(3)} \\\</code>
$6.45 \pm 0.02^{+0.03}_{-0.04}$	<code>\num{6.45(2)(3:4)}</code>

`parse-numbers` The `parse-numbers` option turns the entire parsing system on and off. The option is made available for two reasons. First, if all of the numbers in a document are to be reproduced “as given”, turning off the parser will represent a significant saving in processing required. Second, it allows the use of arbitrary \TeX code in numbers. If the parser is turned off, the input will be printed in math mode (requiring `\text` to protect any text in the number).

²The package author favors the form without a decimal marker, and formal guidance is ambiguous on which is correct. The form with a decimal marker is seen in for example some NIST publications.

```
\num[parse-numbers = false]{\sqrt{2}} \\  
\qty[parse-numbers = false]{\sqrt{3}}{\metre}  
  
 $\sqrt{2}$   
 $\sqrt{3}\text{ m}$ 
```

evaluate-expression With the standard settings, numerical input is parsed “as is” with no attempt to interpret it mathematically. By enabling the `evaluate-expression` option, the input can be processed by the standard L^AT_EX₃ FPU (see package `xfp` for more). The nature of the expression itself can be adjusted using the `expression` setting: as standard, the entire input is simply parsed with no change, but this setting may be used to add additional steps. The *input* in such an expression is represented by `#1`. Note that the FPU uses its own syntax for numbers, most notably in that a decimal marker must be ..

```
\sisetup{evaluate-expression}%  
\qty{2 + 4 * 3}{\joule} \\  
\qty[expression = 10 * (#1)]{2 + 4 * 3}{\joule}  
  
14 J  
140 J
```

retain-explicit-decimal-marker In some areas, a trailing decimal marker with no decimal part present is used to show that zeros in the integer part are significant. This can be enabled using the `retain-explicit-plus` option. The inclusion of a leading plus sign is usually unnecessary for positive numbers, and so they are not retained as-standard when parsing. The `retain-explicit-plus` option is available to control this behavior. Similarly, an uncertainty of zero is normally not meaningful, and so is ignored by the parser. This can be controlled using the `retain-zero-uncertainty` option. Finally, a negative sign for an entirely zero value may or may not have significance: this is controlled by the `retain-negative-zero` option.

```
\num{10.} \\  
\num[retain-explicit-decimal-marker]{10.} \\  
\num{+345} \\  
\num[retain-explicit-plus]{+345} \\  
\num{-0} \\  
\num[retain-negative-zero]{-0} \\  
\num{12.3(0)} \\  
\num[retain-zero-uncertainty]{12.3(0)}  
  
10  
10.  
345  
+345  
0  
-0  
12.3  
12.3(0)
```

4.4 Post-processing numbers

Before typesetting numbers, various post-processing steps can be carried out. These involve adding or removing information from the number in a systematic way; the options are summarised in Table 12.

Table 12: Number post-processing options.

Option name	Type	Default
drop-exponent	Switch	false
drop-uncertainty	Switch	false
drop-zero-decimal	Switch	false
exponent-mode	Switch	input
exponent-thresholds	Literal	-3:3
fixed-exponent	Integer	0
minimum-integer-digits	Integer	0
minimum-decimal-digits	Integer	0
round-direction	Choice	nearest
round-half	Choice	up
round-minimum	Literal	0
round-mode	Choice	none
round-pad	Switch	true
round-precision	Integer	2
round-zero-positive	Switch	true
uncertainty-round-direction	Choice	nearest

`exponent-mode` Numbers can be converted to scientific notation by the package. This is controlled by
`fixed-exponent` the `exponent-mode` option, which takes choices `input`, `fixed`, `engineering`, `scientific` and `threshold`. The `fixed` setting will use the exponent value by the `fixed-exponent` option. When `engineering` is set, the exponent is always a power of three.

	<code>\num{0.001}</code>	<code>\</code>
	<code>\num{0.0100}</code>	<code>\</code>
	<code>\num{1200}</code>	<code>\</code>
0.001	<code>\sisetup{exponent-mode = scientific}%</code>	
0.0100	<code>\num{0.001}</code>	<code>\</code>
1200	<code>\num{0.0100}</code>	<code>\</code>
1×10^{-3}	<code>\num{1200}</code>	<code>\</code>
1.00×10^{-2}	<code>\sisetup{exponent-mode = engineering}%</code>	
1.200×10^3	<code>\num{0.001}</code>	<code>\</code>
1×10^{-3}	<code>\num{0.0100}</code>	<code>\</code>
10.0×10^{-3}	<code>\num{1200}</code>	<code>\</code>
1.200×10^3	<code>\sisetup{</code>	
$0.000\,01 \times 10^2$	<code>exponent-mode = fixed,</code>	
$0.000\,100 \times 10^2$	<code>fixed-exponent = 2,</code>	
12.00×10^2	<code>}%</code>	
	<code>\num{0.001}</code>	<code>\</code>
	<code>\num{0.0100}</code>	<code>\</code>
	<code>\num{1200}</code>	

When used with a `fixed-exponent` of zero, this may be used to remove scientific notation from the input

	<code>\num{1.23e4}</code>	<code>\</code>
	<code>\num[exponent-mode = fixed, fixed-exponent = 0]{1.23e4}</code>	
1.23×10^4		
12 300		

Table 13: Thresholds for exponents.

Input	Threshold $-3 : 3$	Threshold $-2 : 2$
0.001	1×10^{-3}	1×10^{-3}
0.012	0.012	1.2×10^{-2}
0.123	0.123	0.123
1	1	1
12	12	12
123	123	1.23×10^2
1234	1.234×10^3	1.234×10^3

`exponent-thresholds` When the `exponent-mode` is set to `threshold`, values outside of a threshold range for the exponent are always printed in scientific form. The threshold range itself is controlled by `exponent-thresholds`, which is given as $\langle min \rangle : \langle max \rangle$ (Table 13).

```
\begin{table}
  \caption{Thresholds for exponents.%
    \label{tab:threshold}}
  \begin{tabular}
    {
      @{}
      S
      S[exponent-mode = threshold]
      S[exponent-mode = threshold, exponent-thresholds = -2:2]
      @{}
    }
  \toprule
    {Input} & {Threshold  $-3:3$ } & {Threshold  $-2:2$ } \\
  \midrule
    0.001 & 0.001 & 0.001 \\
    0.012 & 0.012 & 0.012 \\
    0.123 & 0.123 & 0.123 \\
    1      & 1      & 1      \\
    12     & 12     & 12     \\
    123    & 123    & 123    \\
    1234   & 1234   & 1234   \\
  \bottomrule
  \end{tabular}
\end{table}
```

Exponent mode applies *after* rounding, such that the number of decimal places for rounding is those which appear in the output.

`drop-exponent` The use of an uncertainty can be suppressed entirely using the `drop-uncertainty` option: this applies *before* rounding is attempted. Similarly, exponents can be dropped using `drop-exponent` can be used to suppress the exponent part (*after* conversion to a fixed exponent).

0.01(2)	<code>\num{0.01(2)}</code>
0.01	<code>\num[drop-uncertainty]{0.01(2)}</code>
0.01×10^3	<code>\num{0.01e3}</code>
0.01	<code>\num[drop-exponent]{0.01e3}</code>

`round-mode` The package can round numerical input to a fixed number of significant figures or
`round-precision` decimal places. This is controlled by the `round-mode` option, which takes the choices
`round-pad` `none`, `figures`, `places` and `uncertainty`. When rounding is turned on, the number
of digits used (either decimal places or significant figures in the mantissa) is set using
the `round-precision` option. Rounding numbers with uncertainties may be carried out
using the `uncertainty` setting to `round-mode`. In this case the precision is used first to
round the uncertainty itself (to a number of figures), before rounding the main value to
follow.

	<code>\num{1.23456}</code>	<code>\\</code>
	<code>\num{14.23}</code>	<code>\\</code>
	<code>\num{0.12345(9)}</code>	<code>\\</code>
	<code>\sisetup{</code>	
	<code> round-mode</code>	<code>= places,</code>
	<code> round-precision</code>	<code>= 3</code>
	<code>}%</code>	
1.234 56	<code>\num{1.23456}</code>	<code>\\</code>
14.23	<code>\num{14.23}</code>	<code>\\</code>
0.123 45(9)	<code>\num{0.12345(9)}</code>	<code>\\</code>
1.235	<code>\sisetup{</code>	
14.230	<code> round-mode</code>	<code>= figures,</code>
0.123 45(9)	<code> round-precision</code>	<code>= 3</code>
1.23	<code>}%</code>	
14.2	<code>\num{1.23456}</code>	<code>\\</code>
0.123 45(9)	<code>\num{14.23}</code>	<code>\\</code>
0.123 45(9)	<code>\num{0.12345(9)}</code>	<code>\\</code>
0.1235(2)	<code>\sisetup{</code>	
0.123(2)	<code> round-mode</code>	<code>= uncertainty,</code>
	<code> round-precision</code>	<code>= 1</code>
	<code>}%</code>	
	<code>\num{0.12345(9)}</code>	<code>\\</code>
	<code>\num{0.12345(23)}</code>	<code>\\</code>
	<code>\num{0.12345(234)}</code>	

Rounding may “extend” a short number to more digits (or figures): this is controlled by
the switch `round-pad`, which is `true` as standard.

```
\sisetup{round-mode = figures, round-precision = 4}%
\num{12.3} \\
\num[round-pad = false]{12.3}
12.30
12.3
```

`round-direction` The detail of which approach to use for rounding may be adjusted using the options
`round-half` `round-direction` and `round-half`. The option `round-direction` determines which di-
rection a value is rounded toward: a choice of `nearest`, `up` or `down`. The standard setting,
`nearest`, gives the common outcome that values round depending on whether the pre-
ceding digit is greater or less than 5. The options `up` and `down` mean that values are
always rounded in one direction: the `down` option may be thought of as “truncation”.

	<code>\sisetup{round-mode = places}</code>
0.05	<code>\num{0.054} \\\</code>
0.05	<code>\num{0.046} \\\</code>
0.05	<code>\sisetup{round-direction = down}%</code>
0.04	<code>\num{0.054} \\\</code>
0.06	<code>\num{0.046} \\\</code>
0.05	<code>\sisetup{round-direction = up}%</code>
	<code>\num{0.054} \\\</code>
	<code>\num{0.046}</code>

For rounding to nearest, where the rounded part of a number is exactly half, there are two common methods for “breaking the tie”. The choice of method is determined by the option `round-half`, which recognises the choices up and even.

	<code>\sisetup{</code>
	<code> round-mode = figures,</code>
	<code> round-precision = 1,</code>
	<code> round-half = up</code>
	<code>}%</code>
0.06	
0.05	<code>\num{0.055} \\\</code>
0.06	<code>\num{0.045} \\\</code>
0.04	<code>\sisetup{round-half = even}%</code>
	<code>\num{0.055} \\\</code>
	<code>\num{0.045}</code>

`uncertainty-round-direction` When rounding with uncertainties, the direction to round the uncertainty part may be set independently of the main number: this is typically used to round the uncertainty strictly upward.

```

\sisetup{round-mode = uncertainty}
\num{0.123(141)} \\\
\sisetup{uncertainty-round-direction = up}%
\num{0.123(141)}

0.12(14)
0.12(15)

```

`round-minimum` There are cases in which rounding will result in the number reaching zero. It may be desirable to show such results as below a threshold value. This can be achieved by setting `round-minimum` to the threshold value. There will be no effect when rounding to a number of significant figures as it is not possible to obtain the value zero in these cases.

	<code>\sisetup{round-mode = places}%</code>
0.01	<code>\num{0.0055} \\\</code>
0.00	<code>\num{0.0045} \\\</code>
0.01	<code>\sisetup{round-minimum = 0.01}%</code>
<0.01	<code>\num{0.0055} \\\</code>
	<code>\num{0.0045}</code>

`round-zero-positive` When rounding negative numbers to a fixed number of places, a zero value may result. Usually this is expressed as an unsigned value, but in some cases retaining the negative sign may be desirable. This behavior can be controlled using the `round-zero-positive` switch.

	<code>\sisetup{round-mode = places}%</code>
0.00	<code>\num{-0.001} \\\</code>
-0.00	<code>\sisetup{round-zero-positive = false}%</code>
	<code>\num{-0.001}</code>

`drop-zero-decimal` It may be desirable to convert decimals to integers when the decimal part is zero. This is set up using the `drop-zero-decimal` option, which applies after rounding but before setting minimum numbers of digits.

2.0	<code>\num{2.0} \\\</code>
2.1	<code>\num{2.1} \\\</code>
2	<code>\sisetup{drop-zero-decimal}%</code>
2.1	<code>\num{2.0} \\\</code>
	<code>\num{2.1}</code>

`minimum-decimal-digits` The `minimum-decimal-digits` and `minimum-integer-digits` option may be used to pad numbers to a given size. This applies independent of any rounding.

<code>\num{123} \\\</code>
<code>\num[minimum-integer-digits = 2]{123} \\\</code>
<code>\num[minimum-integer-digits = 4]{123} \\\</code>
<code>\num{0.123} \\\</code>
<code>\num[minimum-decimal-digits = 2]{0.123} \\\</code>
<code>\num[minimum-decimal-digits = 4]{0.123} \\\</code>
123
123
0123
0.123
0.123
0.1230

4.5 Printing numbers

Actually printing numbers is controlled by a number of settings, which apply ideas such as differing decimal markers, digit grouping and so on. All of these options are concerned with the appearance of output, rather than the data it conveys. The options are summarised in Table 14.

`group-digits` Grouping digits into blocks of three is a common method to increase the ease of reading of numbers. The `group-digits` choice controls whether this behavior applies, and takes the values `all`, `none`, `decimal` and `integer`. Grouping can be activated separately for the integer and decimal parts of a number using the appropriately-named values.

<code>\num{12345.67890} \\\</code>
<code>\num[group-digits = none]{12345.67890} \\\</code>
<code>\num[group-digits = decimal]{12345.67890} \\\</code>
<code>\num[group-digits = integer]{12345.67890}</code>
12 345.678 90
12345.67890
12345.678 90
12 345.67890

Table 14: Output options for numbers.

Option name	Type	Default
bracket-ambiguous-numbers	Switch	true
bracket-negative-numbers	Switch	false
digit-group-size	Integer	3
digit-group-first-size	Integer	3
digit-group-other-size	Integer	3
exponent-base	Literal	10
exponent-product	Math	\times
group-allow-singleton	Switch	true
group-digits	Choice	all
group-minimum-digits	Integer	5
group-separator	Literal	\,
negative-color	Literal	<i><none></i>
output-close-uncertainty	Literal)
output-decimal-marker	Literal	.
output-exponent-marker	Literal	<i><none></i>
output-open-uncertainty	Literal	(
print-exponent-implicit-plus	Switch	false
print-implicit-plus	Switch	false
print-mantissa-implicit-plus	Switch	false
print-unity-mantissa	Switch	true
print-zero-exponent	Switch	false
print-zero-integer	Switch	true
simplify-uncertainty	Switch	false
tight-spacing	Switch	false
uncertainty-descriptor-mode	Choice	bracket-separator
uncertainty-descriptor-separator	Literal	\
uncertainty-descriptors	Literal	<i><none></i>
uncertainty-mode	Choice	compact
uncertainty-separator	Literal	<i><none></i>
zero-decimal-as-symbol	Switch	false
zero-symbol	Literal	\mbox{---}

The separator used between groups of digits is stored by the `group-separator` option. This takes literal input and may be used in math mode: for a text-mode full space use `_`.

```
12 345          \num{12345} \\
12,345         \num[group-separator = {,}]{12345} \\
12 345         \num[group-separator = \ ]{12345}
```

`group-minimum-digits` Grouping is not always applied to smaller numbers; this can be controlled using the option `group-minimum-digits`, which specifies how many digits must be present before grouping is applied. The number of digits is considered separately for the integer and decimal parts of the number: grouping does not “cross the boundary”.

```
\num{1234} \\
\num{12345} \\
\num[group-minimum-digits = 5]{1234} \\
\num[group-minimum-digits = 5]{12345} \\
\num{1234.5678} \\
\num{12345.67890} \\
\num[group-minimum-digits = 5]{1234.5678} \\
\num[group-minimum-digits = 5]{12345.67890}

1234
12 345
1234
12 345
1234.5678
12 345.678 90
1234.5678
12 345.678 90
```

`digit-group-size` The number of digits in each group can be controlled by the setting `digit-group-size`, which has standard value 3. Finer control can be achieved using `digit-group-first-size` and `digit-group-other-size`: the first group is that immediately by the decimal point, the other value applies to the second and subsequent groupings. These can be used for example to achieve the grouping typically used in India (lakh).

```
\num{1234567890} \\
\num[digit-group-size = 5]{1234567890} \\
\num[digit-group-other-size = 2]{1234567890}

1 234 567 890
12345 67890
1 23 45 67 890
```

`final-digit-group-min-size` Grouping can result in a “dangling” digit, for example if there are seven digits in the decimal part with the standard group-of-three approach. To allow these to be avoided automatically, the setting `final-digit-group-min-size` is available. Setting this to for example 2 will mean that the final group is enlarged to respect the minimum size where this is required to avoid a group size of 1.

```
\num{0.1234567} \\
\num[final-digit-group-min-size = 2]{0.1234567}

0.123 456 7
0.123 4567
```

`output-decimal-marker` The decimal marker used in output is set using the `output-decimal-marker` option; this can differ from the input marker.

```
\num{1.23} \\
\num[output-decimal-marker = {,}]{1.23} \\
1.23
1,23
```

`exponent-base` When exponents are present in the input, the `exponent-base` and `exponent-product` options set the obvious parts of the output.

```
1 × 102 \num[exponent-product = \times]{1e2} \\
1 · 102 \num[exponent-product = \cdot]{1e2} \\
1 × 22 \num[exponent-base = 2]{1e2}
```

`output-exponent-marker` Alternatively, if the `output-exponent-marker` option is set then the value stored will be used in place of the normal product and base combination.

```
\num[output-exponent-marker = e]{1e2} \\
\num[output-exponent-marker = \mathrm{E}]{1e2}
1e2
1E2
```

`uncertainty-mode` When input is given including a single uncertainty, it can be printed either with the uncertainty in brackets or as a separate number. This behavior is controlled by the `output-open-uncertainty` and `output-close-uncertainty` options. When this is set to `separate`, the uncertainty is printed as an entirely separate number preceded by `\pm`. Other settings all place the uncertainty in brackets directly attached to the main value. The standard setting of `compact` prints digits of uncertainty in the least-significant digits. It does *not* print a decimal marker if the uncertainty crosses the decimal. The setting `full` prints the full value of the uncertainty. Finally, `compact-marker` is available to print in the compact style except where the uncertainty crosses the decimal, in which case the `full` style is used. When the uncertainty is given in brackets, a space may be added between the main number and the uncertainty: this is stored using the `uncertainty-separator` option. The opening and closing brackets used are stored in `output-open-uncertainty` and `output-close-uncertainty`, respectively. Tokens may be inserted before the opening bracket using `uncertainty-separator`. As standard, a break is allowed before a separated uncertainty: this can be suppressed by setting `allow-uncertainty-breaks` to `false`.

```
\num{123.45(120)} \\
\num{0.035(14)} \\
\sisetup{uncertainty-mode = full}
\num{123.45(120)} \\
\num{0.035(14)} \\
\sisetup{uncertainty-mode = compact-marker}
\num{123.45(120)} \\
\num{0.035(14)} \\
\sisetup{
  output-open-uncertainty = [,
  output-close-uncertainty = ],
  uncertainty-separator = \,
}%
\num{1.234(5)}
```


123.45(120)
0.035(14)
123.45(1.20)
0.035(0.014)
123.45(1.20)
0.035(14)
1.234 [5]

uncertainty-descriptors Multiple uncertainties can be given for a number. These are always printed in a separated form. When there is more than one uncertainty part, it may be useful to describe the nature of this value. This can be achieved using the `uncertainty-descriptors` option, which take a comma-separated list of descriptions. The formatting of the descriptors can be adjusted using the settings `uncertainty-descriptor-mode` and `uncertainty-descriptor-separator`. The choices for the mode are `bracket`, `bracket-separator`, `separator` and `subscript`.

```
\num{1.2(3)(4)} \\
\sisetup{uncertainty-descriptors = {sys, stat}}
\num{1.2(3)(4)} \\
\num[uncertainty-descriptor-mode = subscript]{1.2(3)(4)}
1.2 ± 0.3 ± 0.4
1.2 ± 0.3 (sys) ± 0.4 (stat)
1.2 ± 0.3sys ± 0.4stat
```

simplify-uncertainty Where the upper and lower parts of an asymmetrical uncertainty are identical, it may be desirable to print as in symmetrical format. This can be enabled using the `simplify-uncertainty` option.

```
10.56+0.02-0.02 \num{10.56(2:2)} \\
10.56 ± 0.02 \num[simplify-uncertainty]{10.56(2:2)}
```

bracket-ambiguous-numbers There are certain combinations of numerical input which can be ambiguous. This can be corrected by adding brackets in the appropriate place, and is controlled by the `bracket-ambiguous-numbers` switch. This option only applies to pure numbers: when formatting quantities, the need for brackets also depends on the placement of units, so is controlled by `separate-uncertainty-units`.

```
\sisetup{uncertainty-mode = separate}
\num{1.2(3)e4} \\
\num[bracket-ambiguous-numbers = false]{1.2(3)e4}
(1.2 ± 0.3) × 104
1.2 ± 0.3 × 104
```

negative-color The package can detect negative mantissa values and alter print color accordingly. This is disabled by setting the option to an empty value. This option does *not* apply to complex numbers.

```
-15673 \num{-15673} \\
-15673 \num[negative-color = red]{-15673}
```

bracket-negative-numbers A common means to display negative numbers in financial situations is to place them in brackets. This can be carried out automatically using the `bracket-negative-numbers` option. This option does *not* apply to complex numbers.

```

\num{-15673} \\
\num[bracket-negative-numbers]{-15673} \\
\qty{-10}{\metre} \\
\qty[bracket-negative-numbers]{-10}{\metre}
-15 673
(15 673)
-10 m
(10) m

```

tight-spacing Under some circumstances it may be desirable to “squeeze” the output spacing. This is turned on using the `tight-spacing` switch, which compresses spacing where possible.

```

2 × 103 \num{2e3} \\
2x103 \num[tight-spacing = true]{2e3}

```

print-implicit-plus It may be useful to force all numbers to have a sign. This behavior is controlled by the `print-implicit-plus` option: this is used if given and if no sign was present in the input. It is possible to set this behavior for the exponent and mantissa independently.

```

print-mantissa-implicit-plus 345 \num{345} \\
print-exponent-implicit-plus +345 \num[print-implicit-plus]{345}

```

print-unity-mantissa Printing of a mantissa of 1, an exponent of 0 and an integer component of 0 is controllable by the options `print-unity-mantissa`, `print-zero-exponent` and `print-zero-integer`. The standard settings print a mantissa of 1 and an integer part of 0, but omit an exponent of 0. Notice that where both `print-unity-mantissa` and `print-zero-exponent` are set to false, the value 1 will still be printed (*i.e.* `print-zero-exponent` has a higher priority).

```

\num{1e4} \\
\num[print-unity-mantissa = false]{1e4} \\
\num{444e0} \\
\num[print-zero-exponent = true]{444e0} \\
\num{0.123} \\
\num[print-zero-integer = false]{0.123}
1 × 104
104
444
444 × 100
0.123
.123

```

zero-decimal-as-symbol In some areas, particularly financial, entirely zero decimal parts are replaced by a dash. This is supported by option `zero-decimal-as-symbol`, which then uses the material stored using `zero-symbol` as the replacement.

```

\num{123.00} \\
\sisetup{zero-decimal-as-symbol}
\num{123.00} \\
\num[zero-symbol = \text{[---]}]{123.00}
123.00
123.—
123.[—]

```

Table 15: Output options for lists, products and ranges of numbers and quantities.

Option name	Type	Default*
<code>list-close-bracket</code>	Literal)
<code>list-exponents</code>	Choice	individual
<code>list-final-separator</code>	Literal	<code>\text{and}</code>
<code>list-independent-prefix</code>	Switch	false
<code>list-open-bracket</code>	Literal	(
<code>list-pair-separator</code>	Literal	<code>\text{and}</code>
<code>list-separator</code>	Literal	<code>\text{,}</code>
<code>list-units</code>	Choice	repeat
<code>product-close-bracket</code>	Literal)
<code>product-exponents</code>	Choice	individual
<code>product-independent-prefix</code>	Switch	false
<code>product-mode</code>	Choice	symbol
<code>product-open-bracket</code>	Literal	(
<code>product-phrase</code>	Literal	<code>\text{by}</code>
<code>product-symbol</code>	Literal	<code>\times</code>
<code>product-units</code>	Choice	repeat
<code>range-close-bracket</code>	Literal)
<code>range-exponents</code>	Choice	individual
<code>range-independent-prefix</code>	Switch	false
<code>range-open-bracket</code>	Literal	(
<code>range-open-phrase</code>	Literal	<i>empty</i>
<code>range-phrase</code>	Literal	<code>\text{to}</code>
<code>range-units</code>	Choice	repeat

* The default values are actually more complex for two reasons: allowing spaces to work in both math and text modes, and localization of strings.

4.6 Lists, products and ranges

Lists, products and ranges of numbers and quantities have a small number of specialised options, which apply to these more unusual input forms (Table 15).

`list-final-separator` Lists of numbers are printed with a separator between each item, which is stored using the `list-separator` option. The separator before the last item of a list may be different, and is therefore set using the `list-final-separator` option. The separator used for exactly two items is set using the `list-pair-separator` option. Any spaces needed should be included in the option settings: none are added within the code. The separators are always printed in text mode.

```

\umlist{0.1;0.2;0.3} \
\umlist[list-separator = {; }]{0.1;0.2;0.3} \
\umlist[list-final-separator = {, }]{0.1;0.2;0.3} \
\umlist[
  list-separator = { and },
  list-final-separator = { and finally }
]{0.1;0.2;0.3} \
\umlist{0.1;0.2} \
\umlist[list-pair-separator = {, and }]{0.1;0.2}

```

0.1, 0.2 and 0.3
 0.1; 0.2 and 0.3
 0.1, 0.2, 0.3
 0.1 and 0.2 and finally 0.3
 0.1 and 0.2
 0.1, and 0.2

`product-mode` Products of numbers can be output using either a product symbol or phrase: this
`product-phrase` is controlled by the `product-mode` setting. When `symbol` is set, the appropriate symbol
`product-symbol` is stored in `product-symbol`. When using `phrase-mode`, the information is stored in
`product-phrase`. Phrases are always printed in text mode; symbols are printed using
 the same routine as for numbers.

```
\numproduct{5 x 100 x 2} \\
\numproduct[product-symbol = \ensuremath{\cdot}]{5 x 100 x 2} \\
\sisetup{product-mode = phrase}%
\numproduct{5 x 100 x 2} \\
\numproduct[product-phrase = { BY }]{5 x 100 x 2} \\
5 × 100 × 2
5 · 100 · 2
5 by 100 by 2
5 BY 100 BY 2
```

`range-open-phrase` Ranges of numbers can be given as input. These will have an appropriate word or
`range-phrase` symbol inserted between the two entries: this is stored using the `range-phrase` option.
 The phrase should include any necessary spaces: no extra space is added. The phrase is
 always printed in text mode.

```
5 to 100 \numrange{5}{100} \\
5–100 \numrange[range-phrase = --]{5}{100}
```

In some languages, an opening phrase is *required*; this is supported using the `range-open-phrase` key.

```
\numrange{10}{12} \\
\numrange[range-open-phrase = {\text{from} }]{5}{100}
10 to 12
from 5 to 100
```

`list-exponents` Lists, products and ranges can be “compressed” by combining the exponent parts.
`product-exponents` This is controlled by the options `list-exponents`, `product-exponents` and `range-`
`range-exponents` `exponents`, all of which take the choices `individual`, `combine-bracket` and `combine`.
 The standard setting, `individual`, leaves the exponent with the matching value. Both
`combine` and `combine-bracket` take the exponent of the first entry and apply to all other
 entries, with the exponent itself placed at the end.

```

\numlist{5e3;7e3;9e3;1e4} \\
\numproduct{5e3 x 7e3 x 9e3 x 1e4} \\
\numrange{5e3}{7e3} \\
\sisetup
{
  list-exponents    = combine-bracket ,
  product-exponents = combine-bracket ,
  range-exponents   = combine-bracket
}
\numlist{5e3;7e3;9e3;1e4} \\
\numproduct{5e3 x 7e3 x 9e3 x 1e4} \\
\numrange{5e3}{7e3} \\
\sisetup
{
  list-exponents    = combine ,
  product-exponents = combine ,
  range-exponents   = combine
}
\numlist{5e3;7e3;9e3;1e4} \\
\numproduct{5e3 x 7e3 x 9e3 x 1e4} \\
\numrange{5e3}{7e3}

 $5 \times 10^3, 7 \times 10^3, 9 \times 10^3$  and  $1 \times 10^4$ 
 $5 \times 10^3 \times 7 \times 10^3 \times 9 \times 10^3 \times 1 \times 10^4$ 
 $5 \times 10^3$  to  $7 \times 10^3$ 
 $(5, 7, 9 \text{ and } 10) \times 10^3$ 
 $(5 \times 7 \times 9 \times 10) \times 10^3$ 
 $(5 \text{ to } 7) \times 10^3$ 
 $5, 7, 9 \text{ and } 10 \times 10^3$ 
 $5 \times 7 \times 9 \times 10 \times 10^3$ 
 $5 \text{ to } 7 \times 10^3$ 

```

list-units The list-units, product-units and range-units options determine how \qtylist,
product-units \qtyproduct and \qtyrange command print units, respectively. The standard setting for
range-units these is repeat, where each number will be printed with a unit. Alternatives are bracket
and single. If set to single, this will override collection of exponents.

```

\qtylist{2;4;6;8}{\tesla} \\
\qtylist[list-units = bracket]{2;4;6;8}{\tesla} \\
\qtylist[list-units = repeat]{2;4;6;8}{\tesla} \\
\qtylist[list-units = single]{2;4;6;8}{\tesla} \\
\qtyrange{2}{4}{\degreeCelsius} \\
\qtyrange[range-units = bracket]{2}{4}{\degreeCelsius} \\
\qtyrange[range-units = repeat]{2}{4}{\degreeCelsius} \\
\qtyrange[range-units = single]{2}{4}{\degreeCelsius}

2 T, 4 T, 6 T and 8 T
(2, 4, 6 and 8) T
2 T, 4 T, 6 T and 8 T
2, 4, 6 and 8 T
2 °C to 4 °C
(2 to 4) °C
2 °C to 4 °C
2 to 4 °C

```

The option `product-units` also offers the settings `bracket-power` and `power`.

```
\qtyproduct{2 x 4}{\metre} \\
\qtyproduct[product-units = bracket-power]{2 x 4}{\metre} \\
\qtyproduct[product-units = power]{2 x 4}{\metre}

2 m × 4 m
(2 × 4) m2
2 × 4 m2
```

`list-close-bracket` The brackets used can be customised using the relevant `...-open-bracket` and `...-close-bracket` options.

```
product-close-bracket
product-open-bracket \sisetup{
range-close-bracket   list-units      = bracket ,
range-open-bracket    list-open-bracket = [ ,
range-open-bracket    list-close-bracket = ]
}
\qtylist{5e3;7e3;9e3;1e4}{\second} \\
\sisetup{
product-units      = bracket ,
product-open-bracket = \{ ,
product-close-bracket = \}
}
\qtyproduct{5e3 x 7e3 x 9e3 x 1e4}{\metre} \\
\sisetup{
range-units      = bracket ,
range-open-bracket = \langle ,
range-close-bracket = \rangle
}
\qtyrange{2}{4}{\degreeCelsius}

[5 × 103, 7 × 103, 9 × 103 and 1 × 104] s
{5 × 103 × 7 × 103 × 9 × 103 × 1 × 104} m
⟨2 to 4⟩ °C
```

`list-independent-prefix` When converting exponents to prefixes, there are two possible approaches to the case where units are repeated. They can all be converted to use the same (initial) prefix, or they can be processed separately. The `...-independent-prefix` options are used to control this outcome.

```
\sisetup{exponent-to-prefix = true}%
\qtyrange{1e3}{1e9}{\watt} \\
\sisetup{range-independent-prefix = true}%
\qtyrange{1e3}{1e9}{\watt}

1 kW to 1 000 000 kW
1 kW to 1 GW
```

4.7 Complex numbers

A small number of options apply specifically to the handling of complex numbers; these are summarised in Table 16.

`complex-mode` The format in which complex values are printed can be set using the `complex-mode` option. With the standard setting (input), the complex value is printed as-given. By setting the option to `cartesian` or `polar`, the output format can be set to an Cartesian

Table 16: Options for complex numbers.

Option name	Type	Default
<code>complex-angle-unit</code>	Choice	degrees
<code>complex-mode</code>	Choice	input
<code>complex-phase-command</code>	Literal	<code>\angle</code>
<code>complex-root-position</code>	Choice	after-number
<code>complex-symbol-degree</code>	Literal	<code>\degree</code>
<code>input-complex-root</code>	Literal	<code>ij</code>
<code>output-complex-root</code>	Literal	<code>\mathrm{i}</code>
<code>print-complex-unity</code>	Switch	false

or polar form. Conversion uses the $\text{\LaTeX}3$ floating-point unit, so is limited to 16 decimal places. When converting from Cartesian to polar form, the complex root symbol must come at the *end* of the imaginary part. It must also be specified using `i`.

```
\complexnum{1 + i} \\
\complexnum{1:45} \\
\complexnum[complex-mode = cartesian]{1 + i} \\
\complexnum[complex-mode = cartesian, round-mode = places]{1:45} \\
\complexnum[complex-mode = polar]{1 + i} \\
\complexnum[complex-mode = polar]{1:45}
1 + i
1\angle45^\circ
1 + i
0.71 + 0.71i
1.414213562373095\angle45^\circ
1\angle45^\circ
```

`input-complex-root` When using complex numbers in input, the complex root ($i = \sqrt{-1}$) is indicated by one of the tokens stored in `input-complex-roots`. The parser understands complex root symbols given either before or after the associated number (but will detect any invalid arrangement):

```
9.99 + 88.8i \complexnum{9.99 + 88.8i} \\
9.99 + 88.8i \complexnum{9.99 + i88.8}
```

`output-complex-root` The output complex root symbol is independent of the input and can be changed using the `output-complex-root` setting.

```
\complexnum[output-complex-root = i]{1+2i} \\
\complexnum[output-complex-root = j]{1+2i}
1 + 2i
1 + 2j
```

`complex-root-position` The position of the complex root can be adjusted to place it either before or after the associated numeral in a complex number using the `complex-root-position` option.

```
\complexnum{67-0.9i} \\
\complexnum[complex-root-position = before-number]{67-0.9i} \\
\complexnum[complex-root-position = after-number]{67-0.9i}
```

Table 17: Angle options.

Option name	Type	Default
<code>angle-mode</code>	Choice	<code>input</code>
<code>angle-symbol-degree</code>	Literal	<code>\degree</code>
<code>angle-symbol-minute</code>	Literal	<code>\arcminute</code>
<code>angle-symbol-over-decimal</code>	Switch	<code>false</code>
<code>angle-symbol-second</code>	Literal	<code>\arcsecond</code>
<code>angle-separator</code>	Literal	<code>\empty</code>
<code>fill-angle-degrees</code>	Switch	<code>false</code>
<code>fill-angle-minutes</code>	Switch	<code>false</code>
<code>fill-angle-seconds</code>	Switch	<code>false</code>

`67 - 0.9i`

`67 - i0.9`

`67 - 0.9i`

`complex-angle-unit` When printing or converting to polar form, the angle may be interpreted in units set by `complex-angle-unit`: one of degrees or radians. The unit symbol used for degrees is controlled by `complex-symbol-degree`. To allow control of the surrounding of the entire phase part, the option `complex-phase-command` is available. This can be used for example to print using Steinmetz notation (which requires the `steinmetz` package).

```
\complexqty{1:1}{\ohm} \\
\complexqty[complex-angle-unit = radians]{1:1}{\ohm} \\
\complexqty[complex-symbol-degree = d]{1:1}{\ohm} \\
\complexqty[complex-phase-command = \phase]{1:1}{\ohm}
1\angle^{\circ}\Omega
1\angle\Omega
1\angle d\Omega
1\angle^{\circ}\Omega
```

`print-complex-unity` When the complex part of a number is exactly 1, it is possible to either print or suppress the value. This is controlled by the switch `print-complex-unity`.

```
\complexqty{1i}{\ohm} \\
\complexqty[print-complex-unity]{1i}{\ohm}
i\Omega
1i\Omega
```

4.8 Angles

Angle processing provided by the `\ang` function has a set of options which apply in addition to the general ones set up for number processing.

`angle-mode` The format in which angles are printed can be set using the `angle-mode` option. With the standard setting (`input`), the angle is printed as-given. By setting the option to `arc` or `decimal`, the output format can be set to an arc (degrees/minutes/seconds) or decimal value. Conversion uses the $\text{\LaTeX}3$ floating-point unit, so is limited to 16 decimal places.

2.67°	
2°3'4"	<code>\ang{2.67} \\\</code>
2°40'12"	<code>\ang{2;3;4} \\\</code>
2°3'4"	<code>\ang[angle-mode = arc]{2.67} \\\</code>
2.67°	<code>\ang[angle-mode = arc]{2;3;4} \\\</code>
2.051 111 111 111 111°	<code>\ang[angle-mode = decimal]{2.67} \\\</code>
	<code>\ang[angle-mode = decimal]{2;3;4} \\\</code>

When integer angles are converted to arc format, the presence of minute and second components is controlled by the options `fill-angle-minutes` and `fill-angle-seconds` (see below).

angle-separator When angles are printed in arc format, the separation of the different parts is set up using the `arc-separator` option.

6°7'6.5"	<code>\ang{6;7;6.5} \\\</code>
6°7'6.5"	<code>\ang[angle-separator = \,]{6;7;6.5}</code>

fill-angle-degrees Zero-filling for the degree, minute or second parts of an arc is controlled using the `fill-angle-degrees`, `fill-angle-minutes` and `fill-angle-seconds` options. All are off as standard.

	<code>\ang{-1;;} \\\</code>
	<code>\ang{;-2;} \\\</code>
	<code>\ang{;;-3} \\\</code>
	{
-1°	<code>\sisetup{fill-angle-degrees}</code>
-2'	<code>\ang{-1;;} \\\</code>
-3"	<code>\ang{;-2;} \\\</code>
-1°	<code>\ang{;;-3} \\\</code>
-0°2'	}
-0°3"	{
-1°0'	<code>\sisetup{fill-angle-minutes}</code>
-2'	<code>\ang{-1;;} \\\</code>
-0'3"	<code>\ang{;-2;} \\\</code>
-1°0"	<code>\ang{;;-3} \\\</code>
-2'0"	}
-3"	{
	<code>\sisetup{fill-angle-seconds}</code>
	<code>\ang{-1;;} \\\</code>
	<code>\ang{;-2;} \\\</code>
	<code>\ang{;;-3}</code>
	}

angle-symbol-degree With the standard settings, the symbols used for arc angles are the unit commands `\degree`, `\arcminute` and `\arcsecond`. These can be altered using `angle-symbol-minute`, `angle-symbol-second` and `angle-symbol-second`. This is most likely to be used when the definition of the unit macros is altered, for example to set `\arcsecond` as `as` (see also Section 10.12).

	<code>\ang{6;7;6.5} \\\</code>
	<code>\sisetup{</code>
6°7'6.5"	<code>angle-symbol-degree = d ,</code>
6 d7 m6.5 s	<code>angle-symbol-minute = m ,</code>
	<code>angle-symbol-second = s</code>
	}
	<code>\ang{6;7;6.5}</code>

Table 18: Angle options.

Option name	Type	Default
<code>duration-mode</code>	Choice	<code>input</code>
<code>duration-symbol-hour</code>	Literal	<code>\hour</code>
<code>duration-symbol-minute</code>	Literal	<code>\minute</code>
<code>duration-symbol-second</code>	Literal	<code>\second</code>
<code>duration-separator</code>	Literal	<code>_</code>
<code>fill-duration-hours</code>	Switch	<code>false</code>
<code>fill-duration-minutes</code>	Switch	<code>false</code>
<code>fill-duration-seconds</code>	Switch	<code>false</code>

`angle-symbol-over-decimal` In some subject areas, most notably astronomy, the angle symbols are given over the decimal marker, rather than at the end of the number. This behavior is available using the `angle-symbol-over-decimal` option.

```
\ang{45.697}  \\
\ang{6;7;6.5}  \\
\ang[angle-symbol-over-decimal]{45.697}  \\
\ang[angle-symbol-over-decimal]{6;7;6.5}

45.697°
6°7'6.5"
45°697
6°7'6"5
```

4.9 Durations

Duration processing provided by the `\duration` function has a set of options which apply in addition to the general ones set up for number processing.

`duration-mode` The format in which durations are printed can be set using the `duration-mode` option. With the standard setting (`input`), the duration is printed as-given. By setting the option to `component` or `decimal`, the output format can be set to a component (hours/minutes/seconds) or decimal value. Conversion uses the \LaTeX 3 floating-point unit, so is limited to 16 decimal places.

```
\duration{8.56}  \\
\duratiion{8;33;36}  \\
\duratiion[duratiion-mode = component]{8.56}  \\
\duratiion[duratiion-mode = component]{8;33;36}  \\
\duratiion[duratiion-mode = decimal]{8.56}  \\
\duratiion[duratiion-mode = decimal]{8;33;36}  \\

8.56 h
8 h 33 min 36 s
8 h 33 min 36 s
8 h 33 min 36 s
8.56 h
8.56 h
```

When integer durations are converted to component format, the presence of minute and second components is controlled by the options `fill-duration-minutes` and `fill-duration-seconds` (see below).

`duration-separator` When durations are printed in component format, the separation of the different parts is set up using the `duration-separator` option.

```
\duration{6;7;6.5} \\
\duration[duration-separator = {, }]{6;7;6.5}

6 h 7 min 6.5 s
6 h, 7 min, 6.5 s
```

`fill-duration-hours` `fill-duration-minutes` `fill-duration-seconds` Zero-filling for the hour, minute or second components of durations is controlled using the `fill-duration-hours`, `fill-duration-minutes` and `fill-duration-seconds` options. All are off as standard.

```

1 h      \duration{1;;} \\
2 min    \duration{;2;} \\
3 s      \duration{;;3} \\
1 h      {
0 h 2 min \sisetup{fill-duration-hours}
0 h 3 s   \duration{1;;} \\
1 h 0 min \duration{;2;} \\
2 min     \duration{;;3} \\
0 min 3 s }
1 h 0 s   {
2 min 0 s \sisetup{fill-duration-minutes}
3 s       \duration{1;;} \\
          \duration{;2;} \\
          \duration{;;3} \\
          }
          {
          \sisetup{fill-duration-seconds}
          \duration{1;;} \\
          \duration{;2;} \\
          \duration{;;3}
          }
          }
```

`duration-unit-hour` `duration-unit-minute` `duration-unit-second` With the standard settings, the units used for durations are the commands `\hour`, `\minute` and `\second`. These can be altered using `duration-unit-hour`, `duration-unit-minute` and `duration-unit-second`.

```

1 h 3 min 4.5 s
1 d 3 m 4.5 s

\duration{1;3;4.5} \\
\sisetup{
  duration-unit-hour   = d ,
  duration-unit-minute = m ,
  duration-unit-second = s
}
\duration{1;3;4.5}
```

4.10 Creating units

The various macro units are created at the start of the document. `siunitx` can define these such that they are only available for use within the `\unit` and `\qty` functions, or can

Table 19: Unit creation options.

Option name	Type	Default
<code>free-standing-units</code>	Switch	false
<code>overwrite-command</code>	Switch	false
<code>space-before-unit</code>	Switch	false
<code>unit-optional-argument</code>	Switch	false
<code>use-xspace</code>	Switch	false

make the unit macros available throughout the document body. There are a number of settings which control this creation process (Table 19). As a result, these options all apply in the preamble only.

`free-standing-units` The `free-standing-units` option controls whether the unit macros are usable outside of the `\unit` and `\qty` arguments. When this option is true, siunitx creates the macros for general use. The standard method to achieve this does not overwrite any existing macros: this behavior can be altered using the `overwrite-commands` switch. For technical reasons, when `free-standing-units` is set false, the names of unit macros still have to be defined: as such, they will be created if they do not exist, but will raise an error if used outside of the `\unit` and `\qty` arguments.

When using the approach of “free-standing” unit commands, only macros created using `\DeclareSIUnit` are defined generally. Thus prefixes and powers should be combined with the desired unit into a single free-standing command, for example

```
\DeclareSIUnit\kilometre{\kilo\metre}
```

`space-before-unit` When “free standing” unit macros are created, their behavior can be adjusted by a number of options. These are mainly intended for emulating the input syntax of older packages. The option `unit-optional-argument` gives the same behavior for the inputs

```
\qty{10}{\metre}
```

and

```
\metre[10].
```

The `space-before-unit` and `use-xspace` options control the behavior at the “ends” of the unit macros. Activating `space-before-unit` inserts the number–unit space before the unit is printed. This is suitable for the input syntax

```
30\metre
```

but does mean that the unit macros are incorrectly spaced in running text. On the other hand, the `use-xspace` option attempts to correctly space input such as

```
\metre is the symbol for metres.
```

4.11 Using units

Part of the power of siunitx is the ability to alter the output format for units without changing the input. The behavior of units is therefore controlled by a number of options which alter either the processing of units or the output directly (Table 20).

`inter-unit-product` The separator between each unit is stored using the `inter-unit-product` option. The standard setting is a thin space: another common choice is a centered dot. To get the correct spacing it is necessary to use `\ensuremath{{}\cdot{}}` in the latter case.

Table 20: Unit output options.

Option name	Type	Default
bracket-unit-denominator	Switch	true
forbid-literal-units	Switch	false
fraction-command	Literal	\frac
inter-unit-product	Literal	\,
parse-units	Switch	true
per-mode	Choice	power
per-symbol-script-correction	Literal	\!
per-symbol	Literal	/
power-half-as-sqrt	Switch	false
qualifier-mode	Choice	subscript
qualifier-phrase	Literal	<i><empty></i>
sticky-per	Switch	false
unit-font-command	Literal	\mathrm

```
\unit{\farad\squared\lumen\candela} \\
\unit[inter-unit-product = \ensuremath{{}\cdot{}}]
{\farad\squared\lumen\candela}
```

```
F2 lm cd
F2 · lm · cd
```

per-mode The handling of \per is altered using the per-mode choice option. The standard display-per-mode setting is power, meaning that \per generates reciprocal powers for units. Setting the inline-per-mode option to fraction uses the \frac function to typeset the positive and negative powers of a unit separately. The exact function can be adjusted using the fraction-command option.

bracket-unit-denominator

```
\unit{\joule\per\mole\per\kelvin} \\
\unit{\metre\per\second\squared} \\
\unit[per-mode = fraction]{\joule\per\mole\per\kelvin} \\
\unit[per-mode = fraction]{\metre\per\second\squared}
```

```
J mol-1 K-1
m s-2

$$\frac{\text{J}}{\frac{\text{mol K}}{\text{s}^2}}$$

```

The closely-related power-positive-first setting acts in the same way but places all of the positive powers before any negative ones.

```
A mol-1 s
A s mol-1
\unit{\ampere\per\mole\second} \\
\unit[per-mode = power-positive-first]
{\ampere\per\mole\second}
```

It is possible to use a symbol (usually /) to separate the two parts of a unit by setting per-mode to symbol; the symbol used is stored using the setting per-symbol. This method for displaying units can be ambiguous, and so brackets are added unless bracket-unit-denominator is set to false. Notice that bracket-unit-denominator only applies when per-mode is set to symbol.

```

\sisetup{per-mode = symbol}%
\unit{\joule\per\mole\per\kelvin} \\
\unit{\metre\per\second\squared} \\
\unit[per-symbol = \ \text{div}\ ]{\joule\per\mole\per\kelvin} \\
\unit[bracket-unit-denominator = false]{\joule\per\mole\per\kelvin}
J/(mol K)
m/s2
J div (mol K)
J/mol K

```

The often-requested (but mathematically invalid) `repeated-symbol` option is also available to repeat the symbol for each `\per`.

```

\unit[per-mode = repeated-symbol]{\joule\per\mole\per\kelvin}
J/mol/K

```

The use of a symbol can be restricted to the case where exactly one is required: the setting `single-symbol` will use a symbol if and only if there are one or more positive powers and exactly one negative power. In other cases, powers are used.

10 m ⁻¹	<code>\sisetup{per-mode = single-symbol}</code>
20 m/s	<code>\qty{10}{\per\metre} \\</code>
30 J mol ⁻¹ K ⁻¹	<code>\qty{20}{\metre\per\second} \\</code>
	<code>\qty{30}{\joule\per\mole\per\kelvin}</code>

It is possible for the behavior of the `\per` function to depend on the prevailing math style. Setting either `display-per-mode` or `inline-per-mode` independently can be used to achieve this. For example, the following example will use the `symbol` setting for in line math, and the `fraction` setting when used in display math.

		<code>\sisetup{</code>
		<code>display-per-mode = fraction ,</code>
		<code>inline-per-mode = symbol</code>
		<code>}%</code>
J/(mol K)		<code>\$ \unit{\joule\per\mole\per\kelvin} \$</code>
		<code>\[\unit{\joule\per\mole\per\kelvin} \]</code>
		<code>\unit{\joule\per\mole\per\kelvin} \\</code>
		<code>\$</code>
J/(mol K)		<code>\displaystyle</code>
$\frac{J}{\text{mol K}}$		<code>\unit{\joule\per\mole\per\kelvin}</code>
		<code>\$</code>
		<code>\[</code>
		<code>\textstyle</code>
		<code>\unit{\joule\per\mole\per\kelvin}</code>
		<code>\]</code>

`per-symbol-script-correction` When using the `symbol` setting for `per-mode`, there may be the need to adjust spacing between a superscript power and the symbol. This is provided as a command to be inserted between the two items: the standard value is a thin negative space, `\!`.

```

\sisetup{per-mode = symbol}%
\unit{\cm\cubed\per\gram} \\
\unit[per-symbol-script-correction = ]{\cm\cubed\per\gram}
cm3/g
cm3/g

```

sticky-per By default, `\per` applies only to the next unit given.³ By setting the `sticky-per` flag, this behavior is changed so that `\per` applies to all subsequent units.

```
\unit{\pascal\per\gray\henry} \\
\unit[sticky-per]{\pascal\per\gray\henry}

Pa Gy-1 H
Pa Gy-1 H-1
```

qualifier-mode Unit qualifiers can be printed in three different formats, set by the `qualifier-mode` option. The standard setting is subscript, while the options `bracket`, `combine` and `phrase` are also possible. With the last settings, powers can lead to ambiguity and are automatically detected and brackets added as appropriate.

```
\unit{\kilogram\of{pol}\squared\per\mole\of{cat}\per\hour} \\
\unit[qualifier-mode = bracket]
{\kilogram\of{pol}\squared\per\mole\of{cat}\per\hour} \\
\unit[qualifier-mode = combine]
{\deci\bel\of{i}}

kgpol2 molcat-1 h-1
kg(pol)2 mol(cat)-1 h-1
dBi
```

The `phrase` option is used with `qualifier-phrase`, which allows for example a space or other linking text to be inserted.

```
\sisetup{qualifier-mode = phrase, qualifier-phrase = \ }%
\unit{\kilogram\of{pol}\squared\per\mole\of{cat}\per\hour} \\
\sisetup{qualifier-phrase = \ \mbox{of}\ }%
\unit{\kilogram\of{pol}\squared\per\mole\of{cat}\per\hour}

(kg pol)2 (mol cat)-1 h-1
(kg of pol)2 (mol of cat)-1 h-1
```

power-half-as-sqrt In some cases, the power of 0.5 is shown by giving the unit symbol as a square root. This can be enabled by setting `power-half-as-sqrt` to true

```
\unit{\Hz\tothe{0.5}} \\
\unit[power-half-as-sqrt]{\Hz\tothe{0.5}}

Hz0.5
√Hz
```

parse-units Normally, `siunitx` is used with the unit parse enabled, and only prints units directly if there is literal input. However, if the input is known to be essentially consistent and high performance is desired, then the parser can be turned off using the `parse-units` switch.

```
300 MHz \qty{300}{\MHz} \\
300 MHz \qty[parse-units = false]{300}{\MHz}
```

forbid-literal-units Some users may prefer to completely disable the use of literal input in units, for ex-

³This is the standard method of reading units in English: for example, J mol⁻¹ K⁻¹ is pronounced “joules per mole per kelvin”.

Table 21: Options for quantities.

Option name	Type	Default
allow-quantity-breaks	Switch	false
extract-mass-in-kilograms	Switch	true
prefix-mode	Choice	input
quantity-product	Literal	\,
separate-uncertainty-units	Choice	bracket

ample to enforce consistency. This can be accomplished by setting the `forbid-literal-units` switch. With this option enabled, only macro-based units can be used in a document. This only applies when `parse-units` is true.

`unit-font-command` The command used to set unit themselves may be adjusted using the `unit-font-command` option. This is typically set to `\mathrm`.

```
\unit{\lumen} \\  
\unit[unit-font-command = \mathit]{\lumen}  
  
lm  
lm
```

4.12 Quantities

Some options apply to quantities (the combination of a number and a unit), rather than to the numbers or units alone (Table 21).

`allow-quantity-breaks` Usually, the combination of a number and unit is regarded as a single mathematical entity which should not be split across lines. However, there are cases (very long units, narrow columns, *etc.*) where breaks may be needed. This can be turned on using the `allow-quantity-breaks` option.

```
X  
10 m  
X  
m  
10
```

```
\begin{minipage}{3cm}  
% Gives an underfull hbox  
X\hspace{2.4cm}\qty{10}{\metre} \\  
\sisetup{allow-quantity-breaks}  
X\hspace{2.4cm}\qty{10}{\metre}  
\end{minipage}
```

`quantity-product` The product symbol between the number and unit is set using the `quantity-product` option.

```
\qty{2.67}{\farad} \\  
\qty[quantity-product = \ ]{2.67}{\farad} \\  
\qty[quantity-product = ]{2.67}{\farad}  
  
2.67 F  
2.67 F  
2.67F
```

`prefix-mode` The unit prefixes (`\kilo`, *etc.*) are normally given as letters. However, the package `extract-mass-in-kilograms` can convert these into numerical powers. This is controlled by the `prefix-mode` option, which takes the values `input`, `combine-exponent` and `extract-exponent`. The `input` setting leaves the prefixes unchanged. Using `combine-exponent` will add any exponent

amount from the number to the first unit: this will modify any existing prefix. Finally, using `extract-exponent` will remove all prefixes and express them as an exponent. The treatment of kilograms in this case can be set using `extract-mass-in-kilograms`: when true, the *kilo* prefix is retained as part of the unit. This will mean that all grams are converted to kilograms.

```
\qty{1e3}{\metre\second} \\
\qty[prefix-mode = combine-exponent]{1e3}{\metre\second} \\
\qty{10}{\kilo\gram\squared\deci\second} \\
\qty[prefix-mode = extract-exponent]{10}{\kilo\gram\squared\deci\second} \\
\qty[prefix-mode = extract-exponent]{7.5}{\gram} \\
\sisetup{extract-mass-in-kilograms = false}
\qty{10}{\kilo\gram\squared\deci\second} \\
\qty[prefix-mode = extract-exponent]{10}{\kilo\gram\squared\deci\second} \\
\qty[prefix-mode = extract-exponent]{7.5}{\gram} \\
1 \times 10^3 \text{ m s}
1 \text{ km s}
10 \text{ kg}^2 \text{ ds}
10 \times 10^{-1} \text{ kg}^2 \text{ s}
7.5 \times 10^{-3} \text{ kg}
10 \text{ kg}^2 \text{ ds}
10 \times 10^5 \text{ g}^2 \text{ s}
7.5 \text{ g}
```

This option does not apply to units `\degree`, `\arcminute`, `\arcsecond` and `\percent`.

`separate-uncertainty-units`

When a number has multiple parts (such as a separate uncertainty) then the unit must apply to all parts of the number. How this is shown is controlled using the `separate-uncertainty-units` options. The standard setting is `brackets`, which will place the entire numerical part in brackets and use a single unit symbol. Alternative options are `repeat` (print the unit for each part of the number) and `single` (print only one unit symbol: mathematically incorrect).

```
\sisetup{uncertainty-mode = separate}
\qty{12.3(4)}{\kilo\gram} \\
\qty[separate-uncertainty-units = bracket]{12.3(4)}{\kilo\gram} \\
\qty[separate-uncertainty-units = repeat]{12.3(4)}{\kilo\gram} \\
\qty[separate-uncertainty-units = single]{12.3(4)}{\kilo\gram}
(12.3 ± 0.4) kg
(12.3 ± 0.4) kg
12.3 kg ± 0.4 kg
12.3 ± 0.4 kg
```

4.13 Tabular material

Processing of material in tables obeys the same settings as described for the functions already described. However, there are some settings which apply only to the layout of tabular material (Table 22).

`table-alignment-mode`

The method used by `siunitx` to align numbers is selected using the `table-alignment-mode` option, which may be one of `marker`, `format` or `(none)`. With the standard setting, `marker`, the package centers the decimal marker in a tabular column, potentially leaving

Table 22: Options for tabular material.

Option name	Type	Default
table-align-comparator	Switch	true
table-align-exponent	Switch	true
table-align-text-after	Switch	true
table-align-text-before	Switch	true
table-align-uncertainty	Switch	true
table-alignment	Meta	center
table-alignment-mode	Choice	marker
table-auto-round	Switch	false
table-column-width	Length	0pt
table-fixed-width	Switch	false
table-format	Special	2.2
table-model-setup	Literal	<i>(empty)</i>
table-number-alignment	Choice	center
table-text-alignment	Choice	center

white space at the shorter end of a number. The format mode uses information from the `table-format` key to construct a model: this is then used to define the space available to a number. For asymmetrical numbers, this method is strongly preferable. Finally, none disables alignment entirely: numbers are simply parsed.

`table-number-alignment` When `table-alignment-mode` is set to format or none, the placement of the number “block” within the cell as a whole is set by the `table-number-alignment` option, which may be one of left, center or right. (When `table-alignment-mode` is set to marker, the decimal marker is always centered in the cell.) The different alignment choices are illustrated in Table 23, which uses somewhat exaggerated column headings to show the relative position of the cell contents.

```

\begin{table}
  \caption{Aligning the \texttt{S} column.%}
  \label{tab:S:align}}
  \centering
  \sisetup{table-format = 2.4, table-alignment-mode = format}
  \begin{tabular}{@{}}
    S[table-alignment-mode = marker]
    S[table-number-alignment = center]
    S[table-number-alignment = left]
    S[table-number-alignment = right]
  @{}}
  \toprule
  {Some Values} & {Some Values} & {Some Values} & {Some Values} \\
  \midrule
    2.3456 & 2.3456 & 2.3456 & 2.3456 \\
    34.2345 & 34.2345 & 34.2345 & 34.2345 \\
    56.7835 & 56.7835 & 56.7835 & 56.7835 \\
    90.473 & 90.473 & 90.473 & 90.473 \\
  \bottomrule
  \end{tabular}
\end{table}

```

Table 23: Aligning the S column.

Some Values	Some Values	Some Values	Some Values
2.3456	2.3456	2.3456	2.3456
34.2345	34.2345	34.2345	34.2345
56.7835	56.7835	56.7835	56.7835
90.473	90.473	90.473	90.473

Table 24: Parsing without aligning in an S column.

Decimal-centered	Simple centering
12.345	12.345
6.78	6.78
-88.8(9)	-88.8(9)
4.5×10^3	4.5×10^3

When the alignment mode is set to none, number are simply collected and parsed without any further processing, as illustrated in Table 24.

```

\begin{table}
  \caption{Parsing without aligning in an \texttt{S} column.}
  \label{tab:S:parse}
  \begin{tabular}
    {@{}
     S
     S[table-alignment-mode = none]
    @{}}
    \toprule
    {Decimal-centered} &
    {Simple centering} \\
    \midrule
    12.345 & 12.345 \\
    6,78 & 6,78 \\
    -88.8(9) & -88.8(9) \\
    4.5e3 & 4.5e3 \\
    \bottomrule
  \end{tabular}
\end{table}

```

table-format When the `table-alignment-mode` is set to `format`, `siunitx` uses the information set in `table-format` to construct a “model” which defines the space to reserve for a number. The `table-format` key is interpreted in much the same way as a table cell. The numerical part should consist of a number showing how many figures to reserve in each part of the input, plus any comparators, signs, *etc.* A variety of examples are given in Table 25.

```

\begin{table}
  \caption{Reserving space in \texttt{S} columns.}
  \label{tab:S:format}
  \sisetup{
    table-alignment-mode = format,
    table-number-alignment = center,
  }

```

Table 25: Reserving space in S columns.

Values	Values	Values	Values	Values	Values
2.3	2.3	2.3(5)	2.3 ± 0.5	2.3	2.3×10^8
34.23	34.23	34.23(4)	34.23 ± 0.04	34.23	34.23
56.78	56.78	56.78(3)	56.78 ± 0.03	-56.78	56.78×10^3
3.76	3.76	3.76(2)	3.76 ± 0.02	± 3.76	10^6

```

}
\begin{tabular}{@{}
  S[table-format = 2.2]
  S[table-format = 2.2, table-number-alignment = right]
  S[table-format = 2.2(1)]
  S[table-format = 2.2(1), uncertainty-mode = separate]
  S[table-format = +2.2]
  S[table-format = 2.2e1]
@{}}
\toprule
  {Values}
  & {Values}
  & {Values}
  & {Values}
  & {Values} \\
\midrule
  2.3 & 2.3 & 2.3(5) & 2.3(5) & 2.3 & 2.3e8 \\
  34.23 & 34.23 & 34.23(4) & 34.23(4) & 34.23 & 34.23 \\
  56.78 & 56.78 & 56.78(3) & 56.78(3) & -56.78 & 56.78e3 \\
  3,76 & 3,76 & 3,76(2) & 3,76(2) & +-3.76 & e6 \\
\bottomrule
\end{tabular}
\end{table}

```

It is important to note that any parts of a number *not* specified in the table format argument are set to be absent (the number of figures is set to zero). Setting the `table-format` option also resets `table-alignment-mode` to `format`.

`table-model-setup` In some tables (particularly those using bold extended fonts), it may be necessary to insert additional information when creating the “model”. This is handled using the `table-model-setup` key. An example of the use of this key is given in Section 10.14.

Space for material before and after the S column can be reserved by giving model text as part of the `table-format` key. This is then used to provide the necessary gap while maintaining alignment (Table 26).

```

\begin{table}
  \caption{Text before and after numbers.}
  \label{tab:S:ends}
  \sisetup{table-format = {now }2.4{\textsuperscript{\emph{a}}}}
  \begin{tabular}{@{}S@{}}
    \toprule
    {Values} \\
    \midrule
    2.3456 \\

```

Table 26: Text before and after numbers.

Values
2.3456
34.2345 ^a
56.7835
now 90.473

Table 27: The table-align-exponent option.

Header	Header
1.2 $\times 10^3$	1.2×10^3
1.234×10^{56}	1.234×10^{56}

```

34.2345 \textsuperscript{\emph{a}}\\
56.7835 \\
now~ 90.473 \\
\bottomrule
\end{tabular}
\end{table}

```

`table-align-exponent` When printing exponents in tables, there is a choice of aligning the exponent parts or
`table-align-uncertainty` having these close up to the mantissa. This is controlled by the `table-align-exponent`
`table-align-comparator` option (Table 27). Similarly, uncertainty parts which are printed separately from the
mantissa can be aligned or closed up. This is set by the `table-align-uncertainty`
option (Table 28). Finally, the same approach is available for the comparator with the
`table-align-comparator` option (Table 29).

```

\begin{table}
\caption{The \opt{table-align-exponent} option.}
\label{tab:align:exp}}
\sisetup{table-format = 1.3e2}
\begin{tabular}{@{}SS[table-align-exponent = false]@{}}
\toprule
{Header} & {Header} \\
\midrule
1.2e3 & 1.2e3 \\
1.234e56 & 1.234e56 \\
\bottomrule
\end{tabular}
\end{table}

\begin{table}
\caption{The \opt{table-align-uncertainty} option.}
\label{tab:align:uncert}}
\sisetup{
uncertainty-mode = separate,
table-format = 1.3(1),
}
\begin{tabular}{@{}SS[table-align-uncertainty = false]@{}}
\toprule

```

Table 28: The `table-align-uncertainty` option.

Header	Header
1.2 ± 0.1	1.2 ± 0.3
1.234 ± 0.005	1.234 ± 0.005

Table 29: The `table-align-comparator` option.

Header	Header
> 1.2	> 1.2
< 12.34	< 12.34

```

        {Header} & {Header} \\
    \midrule
        1.2(1) & 1.2(3) \\
        1.234(5) & 1.234(5) \\
    \bottomrule
\end{tabular}
\end{table}

\begin{table}
\caption{The \opt{table-align-comparator} option.}
\label{tab:align:comp}
\sisetup{table-format = >2.2}
\begin{tabular}{@{}SS[table-align-comparator = false]@{}}
\toprule
    {Header} & {Header} \\
\midrule
    > 1.2 & > 1.2 \\
    < 12.34 & < 12.34 \\
\bottomrule
\end{tabular}
\end{table}

```

`table-align-text-before` Note markers are often given in tables after the numerical content. It may be desirable for these to close up to the numbers. Whether this takes place is controlled by the `table-align-text-before` and `...-after` option (Table 30).

```

\begin{table}
\caption{Closing notes up to text.}
\label{tab:S:notes}
\newrobustcmd\NoteMark[1]{%
    \textsuperscript{\emph{\#1}}%
}
\sisetup{table-format = {\NoteMark{a}}2.4}
\begin{tabular}{@{}S
    S[table-align-text-before = false]
@{}}
\toprule
    {Values} & & {Values} \\
\midrule

```

Table 30: Closing notes up to text.

Values	Values
2.3456	2.3456
^a 4.234	^a 4.234
^b 0.78	^b 0.78
^d 88	^d 88

Values	Values
2.3456	2.3456
34.234 ^a	34.234 ^a
56.78 ^b	56.78 ^b
90.4 ^c	90.4 ^c
88 ^d	88 ^d

```

                2.3456 &                2.3456 \\
\NoteMark{a} 4.234 & \NoteMark{a} 4.234 \\
\NoteMark{b} .78 & \NoteMark{b} .78 \\
\NoteMark{d} 88 & \NoteMark{d} 88 \\
\bottomrule
\end{tabular}
\hspace{\fill}%
\sisetup{table-format = 2.4\NoteMark{a}}
\begin{tabular}{@{}}
S
S[table-align-text-after = false]
@{}}
\toprule
{Values} & {Values} \\
\midrule
2.3456 & 2.3456 \\
34.234 \NoteMark{a} & 34.234 \NoteMark{a} \\
56.78 \NoteMark{b} & 56.78 \NoteMark{b} \\
90.4 \NoteMark{c} & 90.4 \NoteMark{c} \\
88 \NoteMark{d} & 88 \NoteMark{d} \\
\bottomrule
\end{tabular}
\end{table}

```

`table-auto-round` The contents of table cells can automatically be rounded or zero-filled to the number of decimal digits given for the decimal part of the `table-format` option. This mode is activated using the `table-auto-round` switch, as illustrated in Table 31.

```

\begin{table}
\centering
\caption{The \opt{table-auto-round} option.}
\label{tab:S:auto}}
\sisetup{table-format = 1.3}
\begin{tabular}{@{}SS[table-auto-round]@{}}
\toprule
{Header} & {Header} \\
\midrule
1.2 & 1.2 \\
1.2345 & 1.2345 \\
\bottomrule
\end{tabular}
\end{table}

```

`parse-numbers` When the `parse-numbers` option is set to `false`, then the alignment code for tables

Table 31: The `table-auto-round` option.

Header	Header
1.2	1.200
1.2345	1.235

Table 32: Aligning without parsing.

Some values	Some values	Some values	Some values
2.35	2.35	2.35	2.35
34.234	34.234	34.234	34.234
56.783	56.783	56.783	56.783
3.762	3.762	3.762	3.762
$\sqrt{2}$	$\sqrt{2}$	$\sqrt{2}$	$\sqrt{2}$

takes a different approach. The output is always set in math mode, and alignment takes place at the first decimal marker. This is achieved by making it active in math mode. When reserving space for content only the integer and decimal values for the mantissa are considered (Table 32).

```

\begin{table}
  \caption{Aligning without parsing.%}
  \label{tab:S:nonparsed}}
  \sisetup{
    parse-numbers = false,
    table-format = 3.3
  }
  \centering
  \begin{tabular}{@{}}
    S
    S[table-number-alignment = center]
    S[table-number-alignment = right]
    S[table-number-alignment = left]
    @{}
  \toprule
    {Some values}
    & {Some values}
    & {Some values}
    & {Some values} \\
  \midrule
    2.35 & 2.35 & 2.35 & 2.35 \\
    34.234 & 34.234 & 34.234 & 34.234 \\
    56.783 & 56.783 & 56.783 & 56.783 \\
    3,762 & 3,762 & 3,762 & 3.762 \\
    \sqrt{2} & \sqrt{2} & \sqrt{2} & \sqrt{2} \\
  \bottomrule
  \end{tabular}
\end{table}

```

`drop-exponent` In cases where data cover a range of values, printing using a fixed exponent in a table may make presentation clearer. In these cases, dropping the exponent value from the

Table 33: The drop-exponent option.

Header	Header / 10^3
1.2×10^3	1.2
3×10^2	0.3
1.0×10^4	10

table is useful. The general numerical options drop-exponent combined with exponent-mode = fixed can be used to achieve this (Table 33).

```
\begin{table}
  \caption{The \opt{drop-exponent} option.%
    \label{tab:exp:omit}}
  \begin{tabular}{@{}
    S[table-format = 1.1e1]
    S[
      drop-exponent = true,
      exponent-mode = fixed,
      fixed-exponent = 3,
      table-format = 2.1,
    ]
    @{}}
    \toprule
      {Header} &
      \multicolumn{1}{c@{}}{Header / \num[print-unity-mantissa = false]{e3}} \\\
    \midrule
      1.2e3 & 1.2e3 \\\
      3e2 & 3e2 \\\
      1.0e4 & 1.0e4 \\\
    \bottomrule
  \end{tabular}
\end{table}
```

table-column-width Usually, the width of the numerical column is allowed to vary depending on the content. However, there are cases where a strictly fixed width is desirable. For these cases, the table-fixed-width and table-column-width options are available. The table-fixed-width option activates fixed-width columns, whilst table-column-width defines the target width (Table 34). Setting table-column-width to a positive value automatically enables table-fixed-width.

```
\begin{table}
  \caption{Fixed-width columns.%
    \label{tab:width:fixed}}
  \begin{tabular}
    @{
      S
      S[table-column-width = 2cm]
      @{}}
    \toprule
      {Flexible} &
      {Fixed} \\\
    \midrule
      1.23 & 1.23 \\\
  \end{tabular}
```

Table 34: Fixed-width columns.

Flexible	Fixed
1.23	1.23
45.6	45.6

Table 35: Right-aligning under a heading.

Long header
12.33
2
1234

```

45.6 & 45.6 \\
\bottomrule
\end{tabular}
\end{table}

```

The `table-column-width` option can also be used to achieve special effects. One example is centring a column of numbers under a wide heading, with the numbers themselves right-aligned (Table 35).

```

\begin{table}
\centering
\caption{Right-aligning under a heading.%}
\label{tab:width:special}}
\settowidth{\mylength}{Long header}
\sisetup{
table-alignment-mode = none ,
table-column-width = \mylength ,
table-number-alignment = right
}
\begin{tabular}{@{}S@{}}
\toprule
{Long header} \\
\midrule
12.33 \\
2 \\
1234 \\
\bottomrule
\end{tabular}
\end{table}

```

`table-text-alignment` Cell contents which are not part of a number can be protected using braces, as illustrated. Cells which contain no numerical data at all are aligned using the setting specified by the `table-text-alignment` option, which recognises the values `center`, `left`, `none` and `right` (Table 36). The setting `none` is intended for use with the package `tabularray`, which carries out its own alignment of textual values.

```

\begin{table}
\caption{Aligning text in \texttt{S} columns.%}
\label{tab:S:text}}

```

Table 36: Aligning text in S columns.

Values	Values	Values
992.435	992.435	992.435
7734.2344	7734.2344	7734.2344
56.7834	56.7834	56.7834
3.7462	3.7462	3.7462

```

\sisetup{table-format = 4.4}
\centering
\begin{tabular}{@{}}
S
S[table-text-alignment = left]
S[table-text-alignment = right]
@{}}
\toprule
{Values}
& {Values}
& {Values} \\
\midrule
992.435 & 992.435 & 992.435 \\
7734.2344 & 7734.2344 & 7734.2344 \\
56.7834 & 56.7834 & 56.7834 \\
3,7462 & 3,7462 & 3,7462 \\
\bottomrule
\end{tabular}
\end{table}

```

table-alignment The table alignment options `table-number-alignment` and `table-text-alignment` can be set to the same value using the `table-alignment` option. This will set all three alignment options to the same value (one of center, right or left).

4.14 Locale options

locale `siunitx` allows the user to switch between the typographic conventions of different (geographical) areas by using locales. Currently, the package is supplied with configurations for locales UK, US, DE (Germany), IT (Italian), PL (Poland), FR (French), SI (Slovene) and ZA (South Africa). The `locale` option is used to switch to a particular locale.

1.234 m	<code>\qty{1.234}{\metre}\%</code>
6,789 m	<code>\qty[locale = DE]{6.789}{\metre}</code>

4.15 Preamble-only options

list-input-separator The separator between *input* elements of lists (`\numlist`, `\qtylist`) and products (`\numproduct`, `\qtyproduct`) can be adjusted using the options `list-input-separator` and `product-input-separator`, respectively. These are load-time only options as the separator here is part of the “document interface” rather than part of the individual number(s). The supplied value should be a *single* marker.

table-column-type The letter(s) used to create table columns can be adjusted using the `table-column-type` option. The standard setting is S, but one or more letters may be used: these must

be single tokens. For example, provided the numprint package has not been loaded, the letter n could be used as this would suggest a numerical column.

`disable-deprecated-commands` `disable-deprecated-options` To allow users to require only interfaces from the current release, the options `disable-deprecated-options` and `disable-deprecated-commands` are available. Setting these to false will disable options and document commands that have been removed from version 3, respectively.

5 Significant new features updates

Here, a short reminder for users of new features added since the release of version 3 of the package is given.

5.1 Version 3.1

- Extend support for complex numbers to cover polar form including new options to control output
- Parse and format multiple uncertainties; new options added to allow descriptions of each uncertainty
- Customisation of text sub/superscript output
- Selectable group size when dividing digits
- Finer controls for “per mode” output
- Support for negative zero values and controlled output for zero values
- Allow negative values to round to zero
- Addition unit abbreviations for capacitance, power and magnetic flux
- Portuguese locale

5.2 Version 3.2

- “Threshold” approach to producing exponent notation: similar to a calculator
- Finer control of printing plus signs using new options to split mantissa and exponent
- Support for updated prefixes introduced by BIPM
- Revised alignment of uncertainties in tabulars

5.3 Version 3.3

- Support for languages which need a begin as well as end phrase in ranges, *e.g.* Italian, was added; this includes appropriate supporting options
- Support for asymmetric uncertainties (tolerances)
- Rounding extended to allow truncation (rounding down) for both main values and when using the uncertainty part
- Finer control of the appearance of brackets in ambiguous output introduced by adding options for different contexts
- Control of list and product input and output extended
- Finer control of table alignment setup for bold values
- New unit abbreviations for magnetic fields

5.4 Version 3.4

- Support uncertainties in seconds part of arc angles
- Control creation of minute and second components on conversion of integer angles to arc format
- Ability to simplify “asymmetric” uncertainties with equal components in both directions
- Combination of all control for angle unit formatting into `\degree`, `\arcminute` and `\arcsecond` unit macros, with `number-angle-product` deprecated
- Support for more varied printing of complex numbers phases

5.5 Version 3.5

- New `\duration` command and supporting options
- Support for extending the last group of numbers to avoid a dangling digit
- Options to suppress interfaces from version 2

6 Upgrading from version 2

The package has been largely re-written internally between versions 2 and 3. A significant number of key-value settings have new, more descriptive, names. Where possible, older names are mapped to newer ones internally: you will be warned in the log if this is the case.

It is possible to use the L^AT_EX 2_ε kernel mechanism to load the last version 2 release for documents that cannot be successfully processed using version 3. This can be achieved using

```
\usepackage{siunitx}[=2021-04-09]
```

or

`\usepackage{siunitx}[=v2]`

This approach will work with older systems which still have version 2 installed, meaning that you can reliably use it to work between systems with different versions of siunitx.

`\SI`
`\SIlist`
`\SIrange`
`\si`

In version 3, the document commands have been revised to be more descriptive. As such, the commands `\SI`, `\SIlist`, `\SIrange` and `\si` remain available but are not recommended for use in new documents. Use the new `\qty...` commands instead: they are clearer and in some cases very slightly faster.

Some changes have been made to the semantics of commands or options. Most notably

- prefixes cannot now be given without units;
- prefixes can only be interconverted with numbers as part of a quantity, not as stand-alone units.

See Section 10.17 for how to work with the new approach if you want to print prefix information.

The font control system has been completely re-written for version 3. The method used is entirely different from version 2. Emulation is therefore not provided for all outcomes: if you need non-standard font settings, you will need to adjust your source. See Section 4.2 for more details on the options available in this area.

The input approach for version 3 is slightly more structured and restricted than for version 2. As well as the updated names for document commands, this means that

- Products of numbers must now be given using the dedicated `\numproduct` and `\qtyproduct` commands;
- Quotients of numbers are only supported as literals;
- Complex values need to be given using the dedicated command `\complexnum`.

The option `round-integer-to-decimal = false` has been removed, and whilst there is not a direct replacement, users are likely to find that `round-pad = false` offers the desired outcome.

A new approach has been taken to providing non-Latin symbols for use in units: these are now handled directly where needed, for example in the definition of the `\micro` prefix.

Translation of fixed strings is now carried out using the translations package. If you have manually set up translations in version 2 using `translator`, you will need to load it manually.

The letter used for a numerical tabular column can now be selected by the user: the letter `S` has been retained as the standard interface. The unit column (`s`) has been removed from this release. It can be emulated using the `collcell` package, for example

```
\usepackage{collcell}
\newcolumnntype{s}{>\collectcell\unit}c<\endcollectcell}}
```

or

```
\usepackage{collcell}
\newcolumnntype{s}{>\collectcell\si}c<\endcollectcell}}
```

If you are using `table-column-width` to have fixed-width columns, you also now need `table-fixed-width` to set this option active.

Direct support for loading a local configuration file, `siunitx.cfg`, has been removed. However, the approach described in Section 10.18 may be used to achieve the same effect with the additions more clearly shown in document sources.

The command `\SendSettingsToPgf` is deprecated, and should be replaced simply by setting the appropriate `\pgfkeys` in parallel to `\sisetup`.

7 Unit changes made by BIPM

In addition to the changes in the `siunitx` package described in Section 6, there are changes in the units defined by the BIPM in the 9th Edition of the SI Brochure which are reflected here. There are two major areas of change.

The first is in respect of units accepted for use with SI units. In the 8th Edition of the SI Brochure, the following units were listed as accepted for use in specialist fields

- ångström (`\angstrom`)
- bar (`\bar`)
- barn (`\barn`)
- knot (`\knot`)
- millimetre of mercury (`\mmHg`)
- nautical mile (`\nauticalmile`)

These are no longer listed in the 9th Edition, and so are deprecated as pre-defined units by `siunitx`. These units will issue a warning on first use, and users should add their own definitions to the start of their sources to avoid this.

Secondly, the move to a new definition of base units means that the table of units determined experimentally has been removed from the SI Brochure. This covers the following units defined by `siunitx` in previous releases

- `\bohr`
- `\clight`
- `\electronmass`
- `\elementarycharge`
- `\hartree`
- `\planckbar`

These are also deprecated in `siunitx` and users should provide their own definitions.

In addition to these two major blocks, the unit `\atomicmassunit` has similar deprecated status: this was listed as with experimentally-determined units in the 8th Edition of the SI Brochure but is equivalent to the dalton, a unit which remains accepted.

8 Localisation

The translations package provides a structured framework for localisation of words and phrases. In particular, it offers the `\GetTranslation` macro, which will provide appropriate translations based on the current babel or polyglossia language setting.

If translations is available, siunitx will load it and alter the standard settings for the `list-final-separator` and `range-phrase` options to read:

```
\sisetup{
  list-final-separator = { \GetTranslation{and} },
  list-pair-separator  = { \GetTranslation{and} },
  range-phrase         = { \GetTranslation{to (numerical range)} },
}
```

The setting for `range-open-phrase` is also adjusted to support a setting for `range-open-phrase`: this requires some conditionals so is more complex.

If the current language is known to the translations package then the result will be localised text. The preamble for this manual loads English, French, German, Italian, Polish, Spanish, Catalan, Portuguese and Brazilian as options, and also loads the babel package:

	<code>% In English by default</code>
	<code>\numlist{1;2;3} \\</code>
	<code>\numrange{1}{10} \\</code>
	<code>\selectlanguage{french}%</code>
1, 2 and 3	<code>\numlist{1;2;3} \\</code>
1 to 10	<code>\numrange{1}{10} \\</code>
1, 2 et 3	<code>\selectlanguage{german}%</code>
1 à 10	<code>\numlist{1;2;3} \\</code>
1, 2 und 3	<code>\numrange{1}{10} \\</code>
1 bis 10	<code>\selectlanguage{italian}%</code>
1, 2 e 3	<code>\numlist{1;2;3} \\</code>
da 1 a 10	<code>\numrange{1}{10} \\</code>
1, 2 i 3	<code>\selectlanguage{polish}%</code>
1 do 10	<code>\numlist{1;2;3} \\</code>
1, 2 y 3	<code>\numrange{1}{10} \\</code>
1 a 10	<code>\selectlanguage{spanish}%</code>
1, 2 i 3	<code>\numlist{1;2;3} \\</code>
1 a 10	<code>\numrange{1}{10} \\</code>
1, 2 e 3	<code>\selectlanguage{catalan}%</code>
1 a 10	<code>\numlist{1;2;3} \\</code>
1, 2 e 3	<code>\numrange{1}{10} \\</code>
1, 2 e 3	<code>\selectlanguage{portuguese}%</code>
1 a 10	<code>\numlist{1;2;3} \\</code>
	<code>\numrange{1}{10} \\</code>
	<code>\selectlanguage{brazilian}%</code>
	<code>\numlist{1;2;3} \\</code>
	<code>\numrange{1}{10}</code>

9 Compatibility with other packages

In general, siunitx should be usable with other packages without interference.

When the physics package is loaded before siunitx, the command `\qty` is not defined. Users may use the version 2 command `\SI`, which can be used as a drop-in replacement for `\qty`. Alternatively, if the siunitx definition is preferred, you may use

```
\AtBeginDocument{\RenewCommandCopy\qty\SI}
```

and use the longer name `\quantity` to access the functionality of the physics package.

10 Hints for using siunitx

10.1 Problematic font encodings

The standard settings in siunitx assume that “sensible” input and font encoding values prevail. The input encoding is assumed to be UTF-8 in all cases. With pdf \LaTeX , the font encoding should be T1, whereas for Xe \LaTeX and Lua \LaTeX , TU (Unicode font encoding) is expected.

Some packages, for example newtxtext or stix2, either force T1 or do not anticipate TU correctly with Xe \LaTeX and Lua \LaTeX . In these cases, the symbols used by siunitx may be incorrect. If correcting the font encoding is not possible, you will need to re-declare the relevant units using symbol definitions which account for this non-standard setup.

10.2 Adjusting `\litre` and `\liter`

As detailed earlier, the unit macros `\litre` and `\liter` are both available for litres. With the standard settings, `\liter` is defined as

```
\DeclareSIUnit\liter{\litre}
```

meaning that `\litre` is the “canonical” unit. This follows the same relationship as exists between `\metre` and `\meter`.

In contrast to metres, however, there is more likelihood of users wishing to adjust the appearance of litres: both “l” and “L” are commonly used. The recommended approach to adjustment is to re-declare the `\litre` macro, as `\liter` will follow automatically.

```
\DeclareSIUnit\litre{l}
```

10.3 Ensuring text or math output

The macros `\ensuremath` and `\text` should be used to ensure that a particular item is always printed in the desired mode. Some mathematical output does not work well in `\mathrm` (the font setting used by siunitx for printing units). The easiest way to solve this is to use the construction `\text{\ensuremath{...}}`, which will print the material in the standard mathematics font without affecting the rest of the output. In some cases, simply forcing `\mathnormal` will suffice, but this is less reliable with non-Latin characters.

10.4 Including a literal hyphen inside `\text`

In most cases, a `-` character inside `\text` will represent a minus. The package will therefore replace it with `\textminus`. However, this may be problematic if you want a hyphen, or if you are using `-` in a piece of \TeX syntax. You can prevent this by using a second set of braces

Table 37: Values as macros in S columns.

Some Values
12 348.812 34
12 348.812 34
12348.81234
12348.81234
1234 8.8 1234

```
\DeclareSIUnit\electronvolt{\text{{e}\kern -0.1em V}}
```

or by defining a protected command that will yield a hyphen on typesetting

```
\usepackage{etoolbox}
\newrobustcmd*\hyphenminus{-}
\DeclareSIUnit\electronvolt{\text{e}\kern \hyphenminus0.1em V}}
```

10.5 Expanding content in tables

When processing tables, siunitx will expand anything stored inside a macro, unless it is long or protected. $\LaTeX 2_{\epsilon}$ robust commands are also detected and are not expanded (Table 37). Values which would otherwise be expanded can be protected by wrapping them in a set of braces. As \TeX itself will expand the first token in a table cell before siunitx can act on it, using the ϵ - \TeX protected mechanism is the recommended course of action to prevent expansion of macros in table cells. (As is shown in the table, \TeX 's expansion of $\LaTeX 2_{\epsilon}$ robust commands can lead to unexpected results.)

```
\begin{table}
\caption{Values as macros in \texttt{S} columns.}
\label{tab:xmpl:macro}
\newcommand\myvaluea{1234}
\newcommand\myvalueb{1234}
\DeclareRobustCommand\myvaluec{1234}
\protected\def\myvalued{1234}
\begin{tabular}{@{}S@{}}
\toprule
{Some Values} \\
\midrule
\myvaluea 8.8 \myvaluea \\ \ % Both expanded
\myvalueb 8.8 \myvalueb \\ \ % First expanded by TeX
\ % to numbers
\myvaluec 8.8 \myvaluec \\ \ % First expanded by TeX
\ % but not to numbers!
\myvalued 8.8 \myvalued \\ \ % Neither expanded
{\myvaluea\ 8.8 \myvaluea} \\ \ % Neither expanded
\bottomrule
\end{tabular}
\end{table}
```

It is possible to use calculated values in tables. For this to work, the calculation must take place before attempting to parse the number (the parser cannot “know” all of the possible values inside an expression). This is most conveniently handled using the xfp

Table 38: Calculated values.

Value	Doubled
66.7012	133.4024
66.0212	132.0424
64.9026	129.8052

package, which is distributed as part of the required support for siunitx. The general approach is illustrated in Table 38

```
\begin{table}
  \caption{Calculated values.%
    \label{tab:xmpl:calc}}
  \newcommand{\valuea}{66.7012}
  \newcommand{\valueb}{66.0212}
  \newcommand{\valuec}{64.9026}
  \begin{tabular}{
    @{}
    S[table-format = 2.4]
    S[table-format = 3.4]
    @{}
  }
    \toprule
      {Value} & {Doubled} \\
    \midrule
      \valuea & \fpeval{\valuea * 2} \\
      \valueb & \fpeval{\valueb * 2} \\
      \valuec & \fpeval{\valuec * 2} \\
    \bottomrule
  \end{tabular}
\end{table}
```

A more sophisticated approach is to generate the rows themselves from a database: this is illustrated in Section 10.6.

10.6 Using siunitx with datatool

As illustrated in Table 38, siunitx can be used to typeset data stored using datatool. For quickly displaying the contents of tables, datatool offers the `\DTLshowtable` macro. This will only work with S columns if number parsing is turned off (Table 39).

```
\DTLnewdb{moredata}
\DTLnewrow{moredata}\DTLnewdbentry{moredata}{value}{ 6.7012}
\DTLnewrow{moredata}\DTLnewdbentry{moredata}{value}{66.0212}
\DTLnewrow{moredata}\DTLnewdbentry{moredata}{value}{64.902 }
\begin{table}
  \caption{Displaying a \textsf{datatool} table.%
    \label{tab:xmpl:datatool}}
  \sisetup{parse-numbers= false, table-format = 2.4}
  \renewcommand*{\dtlrealalign}{S}
  \DTLdisplaydb{moredata}
\end{table}
```

Table 39: Displaying a datatool table.

value
6.7012
66.0212
64.902

Table 40: Calculated values using datatool.

Value	Doubled
66.7012	133.4024
66.0212	132.0424
64.9026	129.8052

The datatool package may also be used to create on-the-fly tables using calculations. For example, the demonstration in Table 38 may be achieved without needing to write out each row, as shown in Table 40. An extra column is used to contain the calculations in this case.

```
\begin{table}
  \caption{Calculated values using \pkg{datatool}.%
    \label{tab:xmpl:datatool-calc}}
  \DTLnewdb{data}
  \DTLnewrow{data}\DTLnewdbentry{data}{value}{66.7012}
  \DTLnewrow{data}\DTLnewdbentry{data}{value}{66.0212}
  \DTLnewrow{data}\DTLnewdbentry{data}{value}{64.9026}
  \begin{tabular}{
    @{}
    S[table-format = 2.4]
    S[table-format = 3.4]
    @{}l
    @{}
  }
  \toprule
    {Value} & {Doubled} &
  \DTLforeach{data}{\myvalue=value}{%
    \DTLiffirstrow {\midrule}{\}%
    \myvalue & % First column
    \fpeval{\myvalue * 2} % second column
    & }\\
  \bottomrule
  \end{tabular}
\end{table}
```

10.7 Using units in section headings and bookmarks

The siunitx code is designed to work correctly with functions in headings. They will print correctly in headings and in the table of contents. As illustrated here, the standard behavior is to ignore font changes. When the hyperref package is loaded, the functions automatically “degrade gracefully” to produce useful information in PDF bookmarks. If

you want more control over the bookmark text, use the `\texorpdfstring` function from `hyperref`, for example:

```
\section{Some text
  \texorpdfstring
    {\unit{\joule\per\mole\per\kelvin}}
    {J mol-1 K-1}%
}
```

You may find it useful to load `hyperref` with the `unicode` option, as this will allow Ω to appear in bookmarks. Without the option, the encoding used by `hyperref` does not support this symbol.

10.8 A left-aligned column visually centered under a heading

When you have a column of non-related numbers, the usual advice is to make these left-aligned and then center the resulting column under the heading. With the `dcolumn` package, that would be done with something like `D{x}{l}{5.0}`. This is something of an abuse of the nature of a number, but can also be done using `siunitx` (Table 41).

```
\begin{table}
  \caption{Formatting unrelated numbers.}
  \label{tbl:xmpl:unrel}
  \centering
  \begin{tabular}
    {
      @{}
      S[
        table-format = 5.0,
        parse-numbers = false,
        input-decimal-markers = x
      ]
      @{}
    }
  \toprule
  \multicolumn{1}{@{}c@{}}{Header} \\
  \midrule
  120   \\
  12.3  \\
  12340 \\
  12.02 \\
  123   \\
  1     \\
  \bottomrule
  \end{tabular}
\end{table}
```

10.9 Regression tables

In some subject areas, it is common to present regression values or similar, which feature an uncertainty value in parenthesis on the line below the main value. As these are separate cells, they cannot be entered using `siunitx` in one value. There are a couple of

Table 41: Formatting unrelated numbers.

Header
120
12.3
12340
12.02
123
1

ways of formatting them using the package, depending on whether the values also need to be parsed.

Where parsing is not required, the most straight-forward method is available: provide a model format allowing space for an extra “digit” at each end, which will then allow for the parenthesis. If a sign is applied to the number, it may not be necessary to add a “digit” for the leading bracket. If parsing is also required, this approach cannot be employed. Instead, the parsing needs to be adjusted such that (and) are not treated as part of the number, and `table-align-text-before` is set to `false` such that these will be placed next to the numerical part. These methods are illustrated in Table 42.

```
\begin{table}
  \caption{Regression tables%
    \label{tab:regression}
  }
  \begin{tabular}
  {
    @{}
    S[table-format = 2.4, parse-numbers = false]
    S[table-format = +1.4, parse-numbers = false]
    S[
      input-open-uncertainty = ,
      input-close-uncertainty = ,
      minimum-decimal-digits = 3, % (
      table-format           = +1.3),
      table-align-text-before = false
    ]
    @{}
  }
  \toprule
  {Header} & {Header} & {Header} \\
  \midrule
  1.234    & -1.234    & -1.23    \\
  (0.053) & (0.053) & (0.053) \\
  \bottomrule
  \end{tabular}
\end{table}
```

10.10 Maximising performance

Both the number and unit parsers require significant effort in terms of TeX programming. For input that does not require such processing, the maximum performance for siunitx

Table 42: Regression tables

Header	Header	Header
1.234	-1.234	-1.230
(0.053)	(0.053)	(0.053)

can therefore be obtained by turning off both systems:

7.3 Hz	<code>\qty{7.3}{\Hz} \\\</code>
7.3 Hz	<code>\qty[parse-units = false]{7.3}{\Hz} \\\</code>
7.3 Hz	<code>\qty[</code> <code> parse-numbers = false,</code> <code> parse-units = false</code> <code>]{7.3}{\Hz}</code>

For tables, any settings that can be given before the table are only parsed once, whereas given in the optional argument to `S` they are read in every cell. As such, you should favour

```
\begin{table}
  \sisetup{...}
  \begin{tabular}{S}
    ...
```

for common settings.

10.11 Special considerations for the `\kWh` unit

The standard settings provide the `\kWh` unit set up with no spacing between the “kW” and the “h” unit to give “kWh”. However, this only applies when the unit is given on its own: combinations will follow the normal rules

<code>kWh</code>	<code>\unit{\kWh} \\\</code>
<code>kWh m⁻¹</code>	<code>\unit{\kWh\per\metre}</code>

This is because the unit `\kWh` is defined so that it can still be varied by altering `\kilo`, `\watt` and `\hour`, and so that the prefix can still be turned into a number. However, some users may prefer to have a non-flexible macro which never adds a space. This can be achieved by redefining `\kWh` with `\DeclareSIUnit`, by added an alternative definition

```
\DeclareSIUnit\kWh{kWh}
\DeclareSIUnit\KWH{KWH}
```

or of course by using literal unit input.

<code>kWh m⁻¹</code>	<code>\unit{\KWH\per\metre}\</code>
<code>kWh m⁻¹</code>	<code>\unit{kWh.m^{-1}}</code>

Another point to notice is that the `\per` macro applies to the next unit, and not an entire unit combination. Thus in

<code>cd kW⁻¹ h</code>	<code>\unit{\candela\per\kWh}</code>
-----------------------------------	--------------------------------------

`\per` applies to the watts but not to the hours. In this case, the units need to be written out in full or the `sticky-per` option should be used.

```

\unit{\candela\per\kilo\watt\per\hour} \\
\unit[sticky-per]{\candela\per\kWh}

cd kW-1 h-1
cd kW-1 h-1

```

10.12 Prefixes and small angles

Typically, prefixes are not applied to the standard symbols for angles: as such, the `\ang` command is not subject to the `prefix-mode` option. In some areas, very small angles are given in arcseconds using the symbol `as`. To apply prefixes in this case, use the `\qty` command rather than `\ang`.

```

% In the preamble
% \DeclareSIUnit\arcsecond{as}
\qty{1e-3}{\arcsecond} \\
\qty[prefix-mode = combine-exponent]{1e-3}{\arcsecond}

1 × 10-3 as
1 mas

```

10.13 Creating a column with numbers and units

Usually, numbers in a table should be given with the units in the column heading. However, there are cases where a series of data are best presented in a table but have different units. There are two ways to do this (Table 43). The first is to place the units in the first column of the table, which makes sense if there are several related items in the table. The second method is to generate two columns, one for numbers and a second for units, and then to format these to give the visual effect of a single column. The later effect is most appropriate when only one set of numbers are presented in a table. This method requires cell content is collected, easiest to do using the `colcell` package.

```

\begin{table}
\caption{Tables where numbers have different units.}
\label{tab:xmpl:mixed}
\hspace{\fill}%
\begin{tabular}
{
@{}
>{\$}l<{\$}
S[table-format = 3.3(1)]
S[table-format = 3.3(1)]
@{}
}
\toprule
& {One} & {Two} \\
\midrule
a / \unit{\pm} & 123.4(2) & 567.8(4) \\
\beta / \unit{\degree} & 90.34(4) & 104.45(5) \\
\mu / \unit{\per\mm} & 0.532 & 0.894 \\
\bottomrule
\end{tabular}
\hspace{\fill}%
\begin{tabular}

```


Table 43: Tables where numbers have different units.

	One	Two	Heading
a/pm	123.4(2)	567.8(4)	1.234 m
$\beta/^\circ$	90.34(4)	104.45(5)	0.835 cd
μ/mm^{-1}	0.532	0.894	4.23 J mol ⁻¹

```

{
  @{}
  S[table-format=1.3]@{\,,}
  >\collectcell\unit}l<\endcollectcell}
  @{}
}
\toprule
\multicolumn{2}{@{}c}{Heading} \\
\midrule
1.234 & \metre \\
0.835 & \candela \\
4.23 & \joule\per\mole \\
\bottomrule
\end{tabular}
\hspace{\fill}%
\end{table}

```

10.14 Tables with heading rows

A common format for tables is to make the heading row visually distinct using a background color and bold text. If numbers appear in such a heading row within an S column then getting the appearance right can be challenging. The best approach is to make the `\bfseries` macro “robust” (as demonstrated in Section 10.5), then to use this macro to make the heading cells bold. This approach is illustrated in Table 44, along with the use of `\rowcolor` to provide a background color. Some typical L^AT_EX font arrangements use a wider (extended) width for the bold font compared with the normal font. This will disturb the alignment if the `table-format` is not symmetrical. For these cases, the `table-model-setup` key may be used to apply the wider font to the “model” used in ensuring alignment.

```

\begin{table}
  \caption{Header row in a table.}
  \label{tab:xmpl:headers}
  \robustify\bfseries
  \centering
  \sisetup{text-series-to-math}
  \begin{tabular}
  {
    @{}
    S[table-format = 3.3]
    S[table-format = 3.6, table-model-setup = \bfseries]
    @{}
  }
  \rowcolor[gray]{0.9}

```

Table 44: Header row in a table.

123.456	123.456789
23.45	23.45
123.4	123.4
3.456	3.456

```
\bfseries 123.456 & \bfseries 123.456789 \\
23.45 & 23.45 \\
123.4 & 123.4 \\
3.456 & 3.456 \\
\end{tabular}
\end{table}
```

10.15 Associating a locale with a babel language

It is possible to instruct the babel package to switch to a particular siunitx locale when changing language. This can be done using the babel `\extras<language>` system. For example, to associate the DE locale with the german babel language, the appropriate code would be

```
\addto\extrasgerman{\sisetup{locale = DE}}
```

10.16 Symbolic “digits”

In some cases you may want to use “digits” which do not fall within the usual set 0123456789. This can be done by setting the `input-digits` option, but bearing in mind that this will affect (prevent) for example rounding.

```
4π × 10-7 \sisetup{input-digits = 0123456789\pi}%
\num{4\pi e-7}
```

Each extra entry should be a single token, and should either have a definition which is safe in both math and text mode, or should only be used when the output mode is known. It may be necessary to make some tokens robust using `etoolbox` for this to work, for example

```
\robustify\dots
\sisetup{input-digits = 0123456789\dots}%
\qty{0,4066\dots}{\metre\squared}
0.4066... m2
```

10.17 Demonstrating prefixes

As siunitx contains data about the numerical values of unit prefixes, you may wish to print this in an automated way. Prefixes cannot be given on their own, but it is possible to create a “do nothing” unit.

```
\DeclareSIUnit\noop{\relax}
```

which can then be used to show just the prefix symbol.

Y `\unit{\yotta\noop}`

To show just the numerical value of a prefix, you will need to use `\qty` and appropriate settings.

```
\qty[prefix-mode = extract-exponent, print-unity-mantissa = false]%
{1}{\yotta\noop}
1024
```

This may be conveniently wrapped up inside a document command, for example

```
\NewDocumentCommand\prefixvalue{m}{%
  \qty[prefix-mode=extract-exponent,print-unity-mantissa=false]{1}{#1\noop}
}
```

10.18 Creating a set of pre-defined units

There are many units which sit outside of those defined in the (current) `si` Brochure which are of use to many people. Most obvious are those which have been detailed in previous editions of the Brochure, as described in Section 7, but there are many others.

It is often convenient to have a pre-defined set of useful units available without needing to copy the full set of definitions into each source file. At the same time, it is important that such sources do show that they are using units not defined by the core part of `siunitx`. The most straight-forward way to achieve this is to create a separate file, for example `siunitx-local-units.tex`, and place it in your local \TeX tree (usually `~/texmf/tex/latex/` on Linux, `~/Library/texmf/tex/latex/` on macOS or `C:\Users\<name>\texmf\tex\latex` on Windows). This can then be loaded in the preamble using

```
% Load useful 'local' units
\input{siunitx-local-units}
```

10.19 Overloading the standard interfaces

The interfaces in `siunitx` deliberately split up different types of numerical input (ranges, products, etc.) for semantic reasons. This also means that there is less chance of confusion in parsing input. However, some users would prefer to overload the `\num` and `\qty` commands such that they accept multiple different types of input. There is a code-level interface that could be used for this, but most end-users will likely want to avoid this. A possible approach that covers most of the common cases is.

```
\ExplSyntaxOn
\cs_gset_eq:NN \ifstrpresent \tl_if_in:nnTF
\ExplSyntaxOff
\NewCommandCopy\oldnum\num
\NewCommandCopy\oldnumrange\numrange
\RenewDocumentCommand\num{O{}m}{%
  \ifstrpresent{#2}{x}
    {\numproduct[#1]{#2}}
  {%
    \ifstrpresent{#2}{;}
      {\numlist[#1]{#2}}
```

```

        {%
        \ifstrpresent{#2}{:}
        {\numrange[#1]{#2}}
        {\oldnum[#1]{#2}}%
        }%
    }%
}
\RenewDocumentCommand\numrange{0{}}>\SplitList{:}}m}
{\oldnumrange[#1]{#2}}

```

for the `\num` command and

```

\ExplSyntaxOn
\cs_gset_eq:NN \ifstrpresent \tl_if_in:nnTF
\ExplSyntaxOff
\NewCommandCopy\oldqty\qty
\NewCommandCopy\oldqtyrange\qtyrange
\RenewDocumentCommand\qty{0{}}mm}{%
    \ifstrpresent{#2}{x}
    {\qtyproduct[#1]{#2}{#3}}
    {%
        \ifstrpresent{#2}{;}
        {\qtylist[#1]{#2}{#3}}
        {%
            \ifstrpresent{#2}{:}
            {\qtyrange[#1]{#2}{#3}}
            {\oldqty[#1]{#2}{#3}}%
        }%
    }%
}
\RenewDocumentCommand\qtyrange{0{}}>\SplitList{:}}mm}
{\oldqtyrange[#1]{#2}{#3}}

```

for `\qty`.

11 Using (SI) units

Consistent and logical units are a necessity for scientific work, and have applicability everywhere. Historically, a number of systems have been used for physical units. SI units were introduced by the *Conférence Générale des Poids et Mesures* (CGPM) in 1960. SI units are a coherent system based on seven base units, from which all other units may be derived.

At the same time, physical quantities with units are mathematical entities, and as such way that they are typeset is important. In mathematics, changes of type (such as using bold, italic, sans serif typeface and so on) convey information. This means that rules exist not only for the type of units to be used under the SI system, but also the way they should appear in print. Advice on best practice has been made available by the *National Institute of Standards and Technology* (NIST) [2].

As befits an agreed international standard, the full rules are detailed. It is not appropriate to reproduce these in totality here; instead, a useful summary of the key points is provided. The full details are available from the *Bureau International des Poids et Mesures* [1].

The siunitx package takes account of the information given here, so far as is possible. Thus the package defaults follow the recommendations made for typesetting numbers and units. Spacing and so forth is handled in such a way as to make implementing the rules (relatively) easy.

11.1 Units

There are seven base SI units, listed in Table 1.4. The base units have been chosen such that all physical quantities can be expressed using an appropriate combination of these units, needing no others and with no redundancy.

All other units within the SI system are regarded as “derived” from the seven base units. At the most basic, all other SI units can be expressed as combinations of the base units. However, many units (listed in Table 2) have a special name and symbol. Most of these units are simple combinations of one or more base units (raised to powers as appropriate).

A series of SI prefixes for decimal multiples and sub-multiples are provided, and can be used as modifiers for any SI unit (either base or derived units) with the exception of the kilogram. The prefixes are listed in Table 4. No space should be used between a prefix and the unit, and only a single prefix should be used. Even the degree Celsius can be given a prefix, for example 1 m°C.

It is important to note that the kilogram is the only SI unit with a prefix as part of its name and symbol. Only single prefix may be used, and so in the case of the kilogram prefix names are used with the unit name “gram” and the prefix symbols are used with the unit symbol g. For example $1 \times 10^{-6} \text{ kg} = 1 \times 10^{-3} \text{ g} = 1 \text{ mg}$.

The application of SI units is meant to provide a single set of units which ensure consistency and clarity across all areas. However, other units are common in many areas, and are not without merit. The units provided by siunitx by default do not include any of these; only units which are part of the SI set or are accepted for use with SI units are defined. However, several other sets of units can be loaded as optional modules. The binary prefixes and units (Table 6) are the most obvious example. These are *not* part of the SI specifications, but the prefix names are derived from those in Table 4.

Other units are normally to be avoided where possible. SI units should, in the main, be preferred due to the advantages of clear definition and self-consistency this brings. However, there will probably always be a place for specialist or non-standard units. This is particularly true of units derived from basic physical constants.

There are also many areas where non-standard units are used so commonly that to do otherwise is difficult or impossible. For example, most synthetic chemists measure the pressure inside vacuum apparatus in mmHg, partly because the most common gauge for the task still uses a column of mercury metal. For these reasons, siunitx allows definition of such units.

11.2 Mathematical meaning

As explained earlier, a quantity combination is a single mathematical entity. This has implications for how both the number and the unit should be printed. Firstly, the two parts should not be separated: a quantity is a product of the number and the unit. With the exception of the symbols for plane angles ($^\circ$, $'$ and as), the `\BPM` specifies either a space or half-height (centered) dot should be used [1].

⁴Some base units need others defined first; there is therefore a required order of definition.

A space for 10 %
and also for 100 °C
but not for 1.23°.

A space for `\qty{10}{\percent}`\\
and also for `\qty{100}{\degreeCelsius}`\\
but not for `\ang{1.23}`.

The mathematical meaning of units also means that the shape, weight and family are important. Units are supposed to be typeset in an upright, medium weight font. Italic, bold and sans serif are all used mathematically to convey other meanings. (In an all sanserif document, using sans serif for units is reasonable.) The `siunitx` package defaults again follow this convention: any local settings are ignored, and uses the current upright math font. However, there are occasions where this may not be the most desirable behavior. A classic example would be in an all-bold section heading. As the surrounding text is bold, some people feel that any units should follow this.

Units should `\textbf{not be bold: \qty{54}{\farad}}`\\
`\textbf{But perhaps in a running block,\\`
`it might look better:`
`\qty[text-series-to-math]{54}{\farad}`

Units should **not be bold:** 54 F
But perhaps in a running block,
it might look better: 54 F

Symbols for units formed from other units by multiplication are indicated by means of either a half-height (that is, centered) dot or a (thin) space.

```
\unit{\metre\second} = \text{metre second}$ \\
\unit{\milli\second} = \text{millisecond}$ \\
\sisetup{inter-unit-product = \ensuremath { { } \cdot { } } }
\unit{\metre\second} = \text{metre second}$ \\
\unit{\milli\second} = \text{millisecond}$

ms = metre second
ms = millisecond
m · s = metre second
ms = millisecond
```

There are some circumstances under which it is common practice to omit any spaces. The classic example is kWh, where “kWh” does not add any useful information. If using such a unit repeatedly, users of `siunitx` are advised to create a custom unit to ensure consistency. It is important to note that while this is common practice, it is *not* allowed by the BIPM [1].

Symbols for units formed from other units by division are indicated by means of a virgule (oblique stroke, slash, /), a horizontal line, or negative exponents.⁵ However, to avoid ambiguity, the virgule must not be repeated on the same line unless parentheses are used. This is ensured when using named unit macros in `siunitx`, which will “trap” repeated division and format it correctly. In complicated cases, negative exponents are to be preferred over other formats.

```
\unit{\joule\per\mole\per\kelvin} \\
\unit[per-mode = fraction]{\joule\per\mole\per\kelvin} \\
\unit[per-mode = symbol]{\joule\per\mole\per\kelvin}

J mol-1 K-1

$$\frac{\text{J}}{\text{mol K}}$$

J/(mol K)
```

⁵Notice that a virgule and a solidus are not the same symbol.

Products and errors should show what unit applies to each number given. Thus $(2 \times 3) \text{ m}$ is an ordered set of lengths of a geometric area, whereas $2 \times 3 \text{ m}$ is a length (and equal to 6 m). Thus, \times is not a product but is a mathematical operator; in the same way, a 2×3 matrix is not a 6 matrix! In some areas, areas and volumes are given with separated units but a unit raised to the appropriate power: $2 \times 3 \text{ m}^2$. Although this does display the correct overall units, it is potentially-confusing and is not encouraged.

Care must be taken when writing ranges of numbers. For purely numerical values, it is common to use an en-dash to show a range, for example “see pages 1–5”. On the other hand, physical quantities could be misinterpreted as negative values if written in this way. As the quantity is a single mathematical entity, writing the values with an en-dash followed by a single unit is also incorrect. As a result, using the word “to” is strongly recommended.

1 m to 5 m long.

`\qtyrange{1}{5}{\metre} long.`

11.3 Graphs and tables

In graphs and tables, repetition of the units following each entry or axis mark is confusing and repetitive. It is therefore best to place the unit in the label part of the information. Placing the unit in square brackets is common but mathematically poor.⁶ Much better is to show division of all quantities by the unit, which leaves the entries as unitless ratios. This is illustrated in Table 45 and Figure 1.

```
\begin{table}
  \caption{An example of table labelling.}
  \label{tab:xmpl:unitless}
  \sisetup{
    table-number-alignment = center,
    table-format = 1.4
  }
  \begin{tabular}{@{}cS@{}}
    \toprule
    Entry & {Length/\unit{\metre}} \\
    \midrule
    1 & 1.1234 \\
    2 & 1.1425 \\
    3 & 1.7578 \\
    4 & 1.9560 \\
    \bottomrule
  \end{tabular}
\end{table}

\begin{figure}
  \begin{tikzpicture}
    \begin{axis}[
      xlabel = $t/\unit{\second}$,
      xmax   = 6,
      xmin   = 0,
      ylabel = $d/\unit{\metre}$,
      ymin   = 0
    ]
    \end{tikzpicture}
  \end{figure}
```

⁶For example, for an acceleration a , the expression $[a]$ is the dimensions of a , *i.e.* length per time squared in this case.

Table 45: An example of table labelling.

Entry	Length/m
1	1.1234
2	1.1425
3	1.7578
4	1.9560

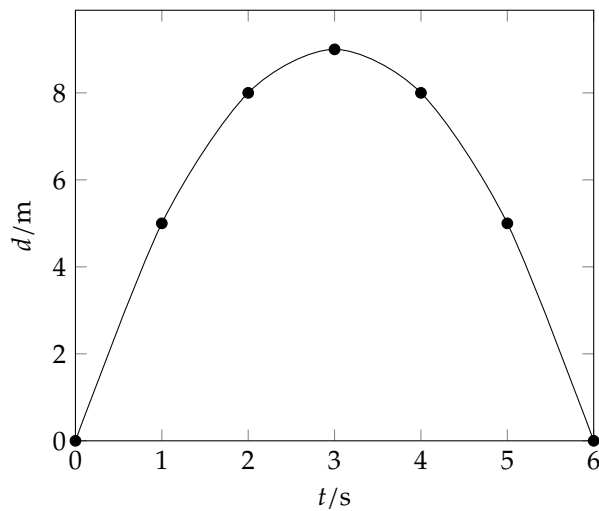


Figure 1: An example of graph labelling.

```

\addplot[smooth,mark=*]
  plot coordinates {
    (0,0)
    (1,5)
    (2,8)
    (3,9)
    (4,8)
    (5,5)
    (6,0)
  };
\end{axis}
\end{tikzpicture}
\caption{An example of graph labelling.%}
\label{fig:xmpl:unitless}}
\end{figure}

```

In most cases, adding exponent values in the body of a table is less desirable than adding a fixed exponent to column headers. An example is shown in Table 46. The use of `\multicolumn` is needed here due to the “<”; without `\multicolumn`, the titles are followed by “kg”!

```

\begin{table}
  \caption{Bad and good columns.%}
  \label{tab:good}}

```


Table 46: Bad and good columns.

Entry	Mass	Mass/ 10^3 kg
1	4.56×10^3 kg	4.56
2	2.40×10^3 kg	2.40
3	1.345×10^4 kg	13.45
4	4.5×10^2 kg	0.45

```

\sisetup{table-number-alignment = center}
\begin{tabular}{
  @{}
  c
  S[table-format = 1.3e1]
  @{\,\,\unit{\kilogram}}
  S[table-format = 2.2]
  @{}
}
\toprule
Entry & \multicolumn{1}{c}{Mass} &
      {Mass/\qty[print-unity-mantissa = false]{e3}{\kilogram}} \\
\midrule
1 & 4.56e3 & 4.56 \\
2 & 2.40e3 & 2.40 \\
3 & 1.345e4 & 13.45 \\
4 & 4.5e2 & 0.45 \\
\bottomrule
\end{tabular}
\end{table}

```

12 Installation

For most users, there will be no need to explicitly install siunitx: it is available from the package management system in current T_EX Live and MiK_TE_X systems.

For manual installation, the package is available from CTAN. As well as the raw source files, CTAN hold the package as a pre-extracted zip file, siunitx.tds.zip. The later is most convenient for most users: simply unzip this in your local texmf directory.

The package requires expl3 support as provided in the l3kernel and bundle, which is required by the L^AT_EX kernel. As such, you are very unlikely to need to update this manually.

13 Thanks

Many users have provided feedback, bug reports and ideas for new features for siunitx: thanks to all of them. Particular thanks to Stefan Pinnow, who has taken the lead role as beta tester for siunitx, finding incorrect output, bad documentation and the odd spelling mistake in the documentation. Thanks also to Enrico Gregorio for encouraging me to complete a fully expl3-compliant version of the package. Thanks also to Danie Els and

Marcel Heldoorn for the Slstyle and Slunits packages, respectively, which provided the starting point for the development of siunitx.

14 Making suggestions and reporting bugs

Feedback on siunitx is always welcome, either to make suggestions or to report problems. When sending feedback, it is always useful if a small example file is included, showing the bug being reported or illustrating the desired output. It is helpful if a “reference rendering” is included, showing what the output should look like. A typical example file might read

```
\listfiles
% Use the article class unless the problem is class-dependent
\documentclass{article}
\usepackage{siunitx}
% Other packages loaded as required
\begin{document}
Reference output: $1.23\,\mathrm{m}$

\textsf{siunitx} output: \qty{1.23}{\metre}
\end{document}
```

As illustrated, it is usually best to use the article class and to only load packages which are needed to show the issue. It is also useful to include a copy of the log file generated by L^AT_EX when reporting a bug (as the versions of packages can be important to solving the issue).

Feedback can be sent in a range of ways. The development code and issue tracker are hosted on GitHub: <https://github.com/josephwright/siunitx/>. Issues opened there are visible to other users and makes sure that they cannot be forgotten.

References

- [1] *The International System of Units (SI)*, <https://www.bipm.org/en/measurement-units/>.
- [2] *International System of Units from NIST*, <http://physics.nist.gov/cuu/Units/index.html>.

Index

The italic numbers denote the pages where the corresponding entry is described, numbers underlined point to the definition, all others indicate the places where it is used.

Symbols	
$\backslash!$	45, 46
$\backslash,$	30, 45, 48
\backslash_{\square}	30
A	
$\backslash A$	13

allow-quantity-breaks (option)	48	\day	7, 10
allow-uncertainty-breaks (option) . . .	32	\dB	15
\ampere	9	\deca	10, 11
\ang	3, 6, 40, 72	\deci	11
\angle	39	\decibel	10
angle-mode (option)	40	\DeclareSIpower	16
angle-separator (option)	41	\DeclareSIPrefix	16
angle-symbol-degree (option)	41	\DeclareSIQualifier	16
angle-symbol-minute (option)	41	\DeclareSIUnit	15, 16, 44, 71
angle-symbol-over-decimal (option) . .	42	\degree	7, 10, 15, 39–41, 49, 61
angle-symbol-second (option)	41	\degreeCelsius	9
\angstrom	63	\deka	10
\approx	22	digit-group-first-size (option)	31
\arcminute	10, 40, 41, 49, 61	digit-group-other-size (option)	31
\arcsecond	10, 40, 41, 49, 61	digit-group-size (option)	31
\as	12	disable-deprecated-commands (option) .	60
\astronomicalunit	10	disable-deprecated-options (option) . .	60
\atomicmassunit	63	display-per-mode (option)	45
\atto	11	\dm	12
B		drop-exponent (option)	26, 56
\bar	63	drop-uncertainty (option)	26
\barn	63	drop-zero-decimal (option)	29
\becquerel	9	\DTLshowtable	67
\bel	10	\duration	3, 6, 42, 61
\bfseries	73	duration-mode (option)	42
\bit	15	duration-separator (option)	43
\bohr	63	duration-unit-hour (option)	43
bracket-ambiguous-numbers (option) . .	33	duration-unit-minute (option)	43
bracket-negative-numbers (option) . . .	33	duration-unit-second (option)	43
bracket-unit-denominator (option) . . .	45	E	
\byte	15	\electronmass	63
C		\electronvolt	10
\C	14	\elementarycharge	63
\cancel	11	\ensuremath	65
\candela	9	\eV	14
\centi	11	evaluate-expression (option)	24
\clight	63	\exa	11
\cm	12	\exbi	15
color (option)	21	exponent-base (option)	32
\color	17	exponent-mode (option)	25
complex-angle-unit (option)	40	exponent-product (option)	32
complex-mode (option)	38	exponent-thresholds (option)	26
complex-phase-command (option)	40	expression (option)	24
complex-root-position (option)	39	extract-mass-in-kilograms (option) . .	48
complex-symbol-degree (option)	40	\extras<language>	74
\complexnum	4, 8, 62	F	
\complexqty	4, 8	\F	14
\coulomb	9	\farad	9
\cubed	10	\femto	11
\cubic	10	\fF	14
D		\fg	12
\dalton	10	\fH	14

fill-angle-degrees (option)	41	input-open-uncertainty (option)	23
fill-angle-minutes (option)	41	input-signs (option)	22
fill-angle-seconds (option)	41	input-uncertainty-divider (option)	23
fill-duration-hours (option)	43	input-uncertainty-signs (option)	23
fill-duration-minutes (option)	43	inter-unit-product (option)	44
fill-duration-seconds (option)	43		
final-digit-group-min-size (option)	31	J	
fixed-exponent (option)	25	\J	14
\fmol	12	\joule	9
forbid-literal-units (option)	47		
\frac	45	K	
fraction-command (option)	45	\K	15
free-standing-units (option)	44	\kA	13
\fs	12	\katal	9
		\kelvin	9
G		\keV	14
\g	12	\kg	12
\ge	22	\kHz	13
\geq	22	\kibi	15
\GetTranslation	64	\kilo	11, 16, 48, 71
\GeV	14	\kilogram	9
\gg	22	\kJ	14
\GHz	13	\km	12
\gibi	15	\kmol	12
\giga	11	\kN	13
\GPa	13	\knot	63
\gray	9	\kohm	13
group-digits (option)	29	\kPa	13
group-minimum-digits (option)	31	\kV	13
group-separator (option)	29	\kW	14
\GW	14	\kWh	14, 71
H		L	
\H	14	\L	13
\hartree	63	\l	13
\hectare	10	\le	22
\hecto	11	\leq	22
\henry	9	list-close-bracket (option)	38
\hertz	9	list-exponents (option)	36
\highlight	11	list-final-separator (option)	35
\hL	13	list-independent-prefix (option)	38
\hl	13	list-input-separator (option)	59
\hour	10, 42, 43, 71	list-open-bracket (option)	38
\Hz	13	list-pair-separator (option)	35
		list-separator (option)	35
I		list-units (option)	37
inline-per-mode (option)	45	\liter	10, 65
input-close-uncertainty (option)	23	\litre	10, 65
input-comparators (option)	22	\ll	22
input-complex-root (option)	39	locale (option)	59
input-decimal-markers (option)	22	\lumen	9
input-digits (option)	22	\lux	9
input-exponent-markers (option)	22		
input-ignore (option)	22	M	
		\m	12

extract-mass-in-kilograms	48	per-symbol-script-correction	46
fill-angle-degrees	41	power-half-as-sqrt	47
fill-angle-minutes	41	prefix-mode	48
fill-angle-seconds	41	print-complex-unity	40
fill-duration-hours	43	print-exponent-implicit-plus	34
fill-duration-minutes	43	print-implicit-plus	34
fill-duration-seconds	43	print-mantissa-implicit-plus	34
final-digit-group-min-size	31	print-unity-mantissa	34
fixed-exponent	25	print-zero-exponent	34
forbid-literal-units	47	print-zero-integer	34
fraction-command	45	product-close-bracket	38
free-standing-units	44	product-exponents	36
group-digits	29	product-independent-prefix	38
group-minimum-digits	31	product-input-separator	59
group-separator	29	product-mode	36
inline-per-mode	45	product-open-bracket	38
input-close-uncertainty	23	product-phrase	36
input-comparators	22	product-symbol	36
input-complex-root	39	product-units	37
input-decimal-markers	22	propagate-math-font	20
input-digits	22	qualifier-mode	47
input-exponent-markers	22	qualifier-phrase	47
input-ignore	22	quantity-product	48
input-open-uncertainty	23	range-close-bracket	38
input-signs	22	range-exponents	36
input-uncertainty-divider	23	range-independent-prefix	38
input-uncertainty-signs	23	range-open-bracket	38
inter-unit-product	44	range-open-phrase	36
list-close-bracket	38	range-phrase	36
list-exponents	36	range-units	37
list-final-separator	35	reset-math-version	20
list-independent-prefix	38	reset-text-family	19
list-input-separator	59	reset-text-series	19
list-open-bracket	38	reset-text-shape	19
list-pair-separator	35	retain-explicit-decimal-marker	24
list-separator	35	retain-explicit-plus	24
list-units	37	retain-negative-zero	24
locale	59	retain-zero-uncertainty	24
minimum-decimal-digits	29	round-direction	27
minimum-integer-digits	29	round-half	27
mode	19	round-minimum	28
negative-color	33	round-mode	27
number-color	21	round-pad	27
number-mode	19	round-precision	27
output-close-uncertainty	32	round-zero-positive	28
output-complex-root	39	separate-uncertainty-units	49
output-decimal-marker	32	simplify-uncertainty	33
output-exponent-marker	32	space-before-unit	44
output-open-uncertainty	32	sticky-per	47
overwrite-functions	44	table-align-comparator	53
parse-numbers	23, 55	table-align-exponent	53
parse-units	47	table-align-text-after	54
per-mode	45	table-align-text-before	54
per-symbol	45	table-align-uncertainty	53

table-alignment	58, 59	\planckbar	63
table-alignment-mode	49	\pm	11, 12, 22, 32
table-auto-round	55	\pmol	12
table-column-type	59	power-half-as-sqrt (option)	47
table-column-width	57	prefix-mode (option)	48
table-fixed-width	57	print-complex-unity (option)	40
table-format	51	print-exponent-implicit-plus (option)	34
table-model-setup	52	print-implicit-plus (option)	34
table-number-alignment	50	print-mantissa-implicit-plus (option)	34
table-text-alignment	58	print-unity-mantissa (option)	34
text-family-to-math	21	print-zero-exponent (option)	34
text-font-command	21	print-zero-integer (option)	34
text-series-to-math	21	product-close-bracket (option)	38
text-subscript-command	21	product-exponents (option)	36
text-superscript-command	21	product-independent-prefix (option) ..	38
tight-spacing	34	product-input-separator (option)	59
uncertainty-descriptor-mode	33	product-mode (option)	36
uncertainty-descriptor-separator	33	product-open-bracket (option)	38
uncertainty-descriptors	33	product-phras (option)	36
uncertainty-mode	32	product-symbol (option)	36
uncertainty-round-direction	28	product-units (option)	37
uncertainty-separator	32	propagate-math-font (option)	20
unit-color	21	\ps	12
unit-font-command	48	\pv	13
unit-mode	19		
unit-optional-argument	44	Q	
use-xspace	44	\qty	3, 7, 8, 11, 15, 43, 44, 65, 72, 75, 76
zero-decimal-as-symbol	34	\qty...	62
zero-symbol	34	\qtylist	3, 7, 37, 59
output-close-uncertainty (option) ...	32	\qtyproduct	3, 8, 37, 59, 62
output-complex-root (option)	39	\qtyrange	4, 8, 37
output-decimal-marker (option)	32	qualifier-mode (option)	47
output-exponent-marker (option)	32	qualifier-phras (option)	47
output-open-uncertainty (option) ...	32	\quantity	65
overwrite-functions (option)	44	quantity-product (option)	48
		\queto	11
P		\quetta	11
\Pa	13		
\pA	12	R	
parse-numbers (option)	23, 55	\radian	9
parse-units (option)	47	\raiseto	10
\pascal	9	range-close-bracket (option)	38
\pebi	15	range-exponents (option)	36
\per	7, 10, 15, 45–47, 71	range-independent-prefix (option) ...	38
per-mode (option)	45	range-open-bracket (option)	38
per-symbol (option)	45	range-open-phras (option)	36
per-symbol-script-correction (option)	46	range-phras (option)	36
\percent	10, 49	range-units (option)	37
\peta	11	reset-math-version (option)	20
\pF	14	reset-text-family (option)	19
\pg	12	reset-text-series (option)	19
\pgfkeys	63	reset-text-shape (option)	19
\pH	14	retain-explicit-decimal-marker (op-	
\pico	11	tion)	2

retain-explicit-plus (option)	24	\tesla	9
retain-negative-zero (option)	24	\TeV	14
retain-zero-uncertainty (option)	24	\texorpdfstring	69
\ronna	11	\text	19, 65
\ronto	11	text-family-to-math (option)	21
round-direction (option)	27	text-font-command (option)	21
round-half (option)	27	text-series-to-math (option)	21
round-minimum (option)	28	text-subscript-command (option)	21
round-mode (option)	27	text-superscript-command (option) . . .	21
round-pad (option)	27	\textminus	65
round-precision (option)	27	\textsubscript	20, 21
round-zero-positive (option)	28	\textsuperscript	20, 21
\rowcolor	73	\THz	13
S		tight-spacing (option)	34
\s	12	\times	35
\second	9, 42, 43	\tonne	10
\SendSettingsToPgfb	63	\tothe	10
separate-uncertainty-units (option) . .	49	U	
\SI	62, 65	\uA	13
\si	62	\uC	14
\siemens	9	\uF	14
\sievert	9	\ug	12
\SIlist	62	\uH	14
\sim	22	\uJ	14
simplify-uncertainty (option)	33	\uL	13
\SIrange	62	\ul	13
\sisetup	4, 63	\um	12
space-before-unit (option)	44	\umol	12
\square	10	uncertainty-descriptor-mode (option) .	33
\squared	10	uncertainty-descriptor-separator (op-	
\steradian	9	tion)	33
sticky-per (option)	47	uncertainty-descriptors (option)	33
T		uncertainty-mode (option)	32
\T	14	uncertainty-round-direction (option) .	28
table-align-comparator (option)	53	uncertainty-separator (option)	32
table-align-exponent (option)	53	\unit	3, 6, 7, 11, 15, 43, 44
table-align-text-after (option)	54	unit-color (option)	21
table-align-text-before (option)	54	unit-font-command (option)	48
table-align-uncertainty (option)	53	unit-mode (option)	19
table-alignment (option)	58, 59	unit-optional-argument (option)	44
table-alignment-mode (option)	49	\us	12
table-auto-round (option)	55	use-xspace (option)	44
table-column-type (option)	59	\uT	14
table-column-width (option)	57	\uV	13
table-fixed-width (option)	57	\uW	14
table-format (option)	51	V	
table-model-setup (option)	52	\V	13
table-number-alignment (option)	50	\volt	9
table-text-alignment (option)	58	W	
\tablenum	4, 17, 18	\W	13
\tebi	15	\watt	9, 71
\tera	11	\weber	9

Y		Z	
<code>\yobi</code>	15	<code>\zebi</code>	15
<code>\yocto</code>	11	<code>\zepto</code>	11
<code>\yotta</code>	11	<code>zero-decimal-as-symbol (option)</code>	34
		<code>zero-symbol (option)</code>	34
		<code>\zetta</code>	11